




MEDO® SLIM & MEDO® HYVE

Effortless installation. Inspiring design.



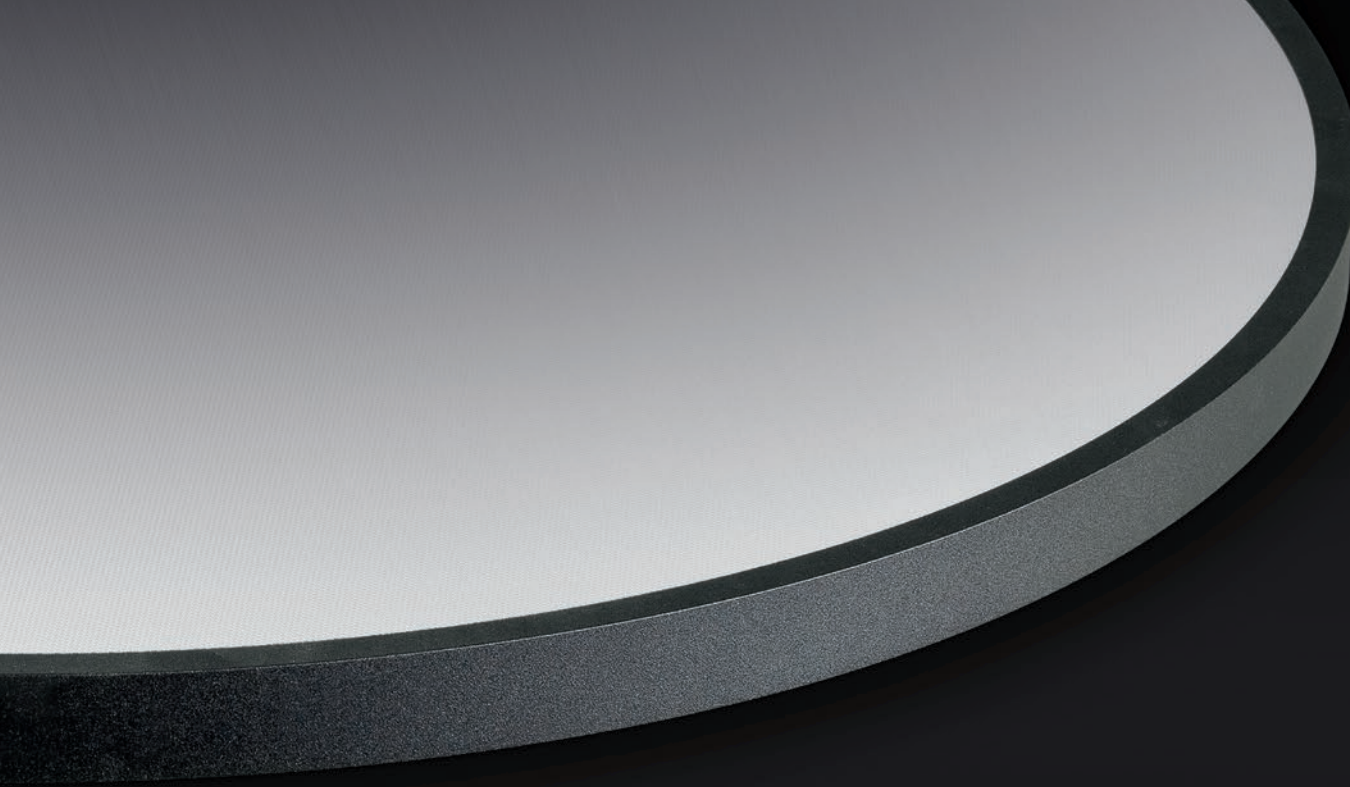

MEDO® SLIM & MEDO® HYVE

Effortless installation. Inspiring design.

A new generation of MEDO® has arrived.

With MEDO® SLIM and MEDO® HYVE, the product family brings together effortless installation and inspiring design for modern commercial interiors.

MEDO® SLIM reinterprets the familiar MEDO® look with a reduced, refined profile and improved EasyBase installation. MEDO® HYVE adds a more design-led character to the range. Its distinctive look, low-glare visual comfort and premium aesthetic make light part of the interior concept.

Together, they create efficient solutions and expressive lighting for spaces where performance, comfort and atmosphere belong together.

THE NEW MEDO® GENERATION AT A GLANCE

Two innovations. One strong product family.

MEDO® SLIM and MEDO® HYVE add two clear profiles to the MEDO® family.



MEDO® SLIM

- 46 % slimmer than before
- Improved EasyBase
- CCT-Switch 3000 K / 4000 K
- Luminous efficacy up to 130 lm/W
- UGR<19 for office application
- 100.000 h (L80B10)

MEDO® HYVE

- Distinctive design featuring a honeycomb felt inlay
- Improved EasyBase
- CCT-Switch 3000 K / 4000 K
- Luminous efficacy up to 139 lm/W
- UGR<13 / UGR<16 for outstanding visual comfort



All MEDO® versions can also be used as pendant lights. For this, you will need a suspension kit which can be ordered separately.

⊕


Type	Options		Colour	Prod. no.
MEDO® 2.0 Suspension kit	central	1.5 m	●	1011779
			○	1011780
	5 m	●	1011781	
			○	1011782
	parallel	3 m	●	1011783
			○	1011784



Fast installation thanks to EasyBase.

The improved EasyBase makes installation even more straightforward. The process is intuitive, reliable, and easy to handle on site.

Available for both MEDO® SLIM and MEDO® HYVE, EasyBase brings the idea of effortless installation to life – from the first mounting step to the final twist.

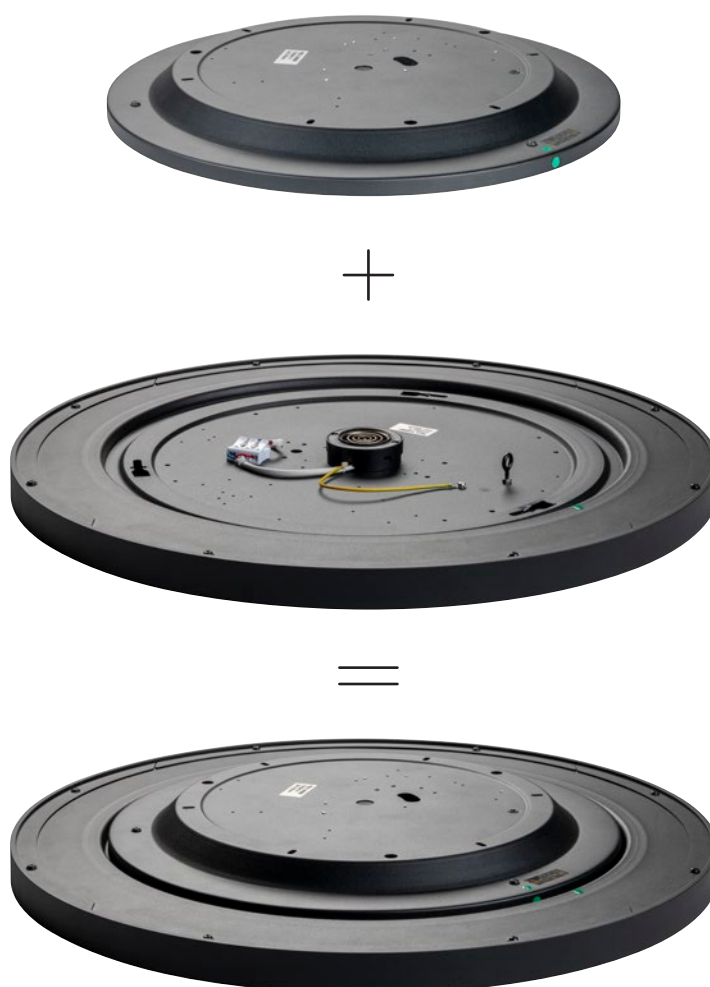

FAST INSTALLATION IN THREE STEPS

1. Screw and wire EasyBase to the ceiling
2. Select the colour temperature via the CCT switch on the luminaire
3. Pay attention to the green markings and twist the luminaire into place*

*For MEDO® versions 60 and 80, a safety chain must also be attached which is provided in the scope of delivery.

Scan the QR code to watch the MEDO® 2.0 installation video.



MEDO® SLIM

Our classic made slim.

MEDO® SLIM stands for maximum efficiency: a reduced profile paired with improved EasyBase installation for fast, reliable project execution.



MEDO® 2.0 SLIM
Ceiling light

220-240 V ~50/60 Hz
Material: aluminium / steel




Control	Ø	Colour	Luminous flux	Colour Temperature	Power	Efficacy	UGR	Prod. no.
Phase	295 mm	●	1000 lm	3000 / 4000 K	8 W	125 lm/W	<19	1011693
		○						1011694
	380 mm	●	1900 lm	3000 / 4000 K	15.5 W	123 lm/W	<19	1011695
		○						1011696
	587 mm	●	4200 lm	3000 / 4000 K	35 W	124 lm/W	<19	1011697
		○						1011698
	768 mm	●	5900 lm	3000 / 4000 K	45 W	131 lm/W	<19	1011699
		○						1011700
DALI2 +Touch Dim	295 mm	●	1000 lm	3000 / 4000 K	8.6 W	125 lm/W	<19	1011701
		○						1011702
	380 mm	●	1900 lm	3000 / 4000 K	15.5 W	123 lm/W	<19	1011703
		○						1011704
	587 mm	●	4200 lm	3000 / 4000 K	34 W	124 lm/W	<19	1011705
		○						1011706
	768 mm	●	5900 lm	3000 / 4000 K	45 W	131 lm/W	<19	1011707
		○						1011708



MEDO® HYVE

Designed to impress.

MEDO® HYVE brings design to life with low glare and a premium aesthetic – creating inspiring spaces with a comfortable lighting experience.

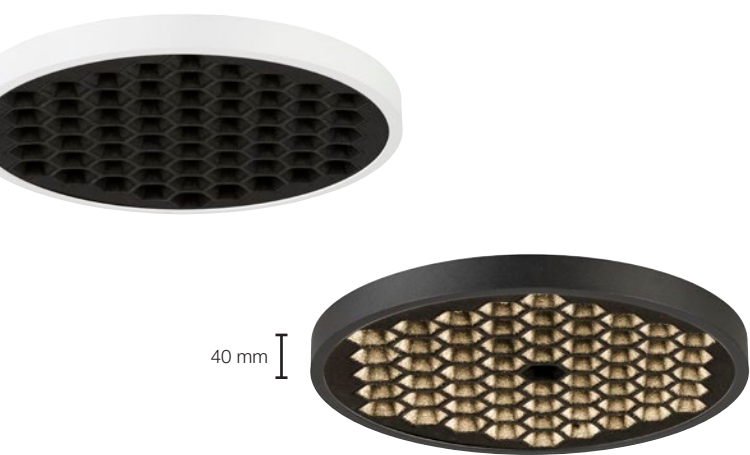

40 mm

MEDO® 2.0 HYVE
Ceiling light

220-240 V ~50/60 Hz
Material: aluminium / steel



Control	Ø	Colour	Luminous flux	Colour Temperature	Power	Efficacy	UGR	Prod. no.
Phase	380 mm	●	2100 lm	3000 / 4000 K	16 W	131 lm/W	<16	1011851
		○						1011850
	585 mm	●	4800 lm	3000 / 4000 K	35 W	137 lm/W	<13	1011855
		○						1011854
	770 mm	●	9700 lm	3000 / 4000 K	70 W	139 lm/W	<13	1011859
		○						1011858
DALI2 +Touch Dim	380 mm	●	2100 lm	3000 / 4000 K	17 W	124 lm/W	<16	1011853
		○						1011852
	585 mm	●	4800 lm	3000 / 4000 K	33 W	145 lm/W	<13	1011857
		○						1011856
	770 mm	●	9700 lm	3000 / 4000 K	67 W	145 lm/W	<13	1011861
		○						1011860



EXPLANATION OF SYMBOLS



Recommendations

Displays accessories and recommended bulbs for the chosen product.



Protection classes

- Protection class I/Protective conductor
- Protection class II/Protection by double or reinforced insulation
- Protection class III/Protection by extra-low voltage



IP protection rating

Indicates the suitability of electrical equipment for different environmental conditions.



Impact resistance rating

The impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.



Half-diffusion angle

Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



Preservation of luminous flux

Describes the amount by which the luminous flux of an LED decreases during a specified period.



Color Rendering Index (CRI)

The **Color Rendering Index** is a measure of the ability of a light source to reveal the colors of various objects faithfully.



CCT switch

By means of an integrated CCT switch, the light colour can be changed from 3000 K to 4000 K during installation.



Products with integrated **LEDs**

OTHER LUMINAIRES IN THE MEDO® FAMILY:



MEDO® PRO



MEDO® RING



MEDO® Recessed



WELL INFORMED

Scan QR code, select country and get
our latest prices. Visit us at slv.com

A large part of the products shown in this brochure are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this brochure are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. Product descriptions and specifications are subject to correction and amendment.

All of the products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This brochure contains a general range and is not country specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes!

SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

SLV GmbH
Daimlerstraße 21-23, 52531 Übach-Palenberg
Germany | +49 (0) 2451 4833 - 333 | info@slv.de

SLV Österreich GmbH
Zaunergasse 4/4, Stock, 1030 Wien
Austria | +49 (0)2451 4833 - 355 | info@slv.de

SLV Belgium N.V.
Herentalsebaan 429, 2160 Wommelgem
Belgium | +32 (0)3 385 30 08 | info.be@slv.com

SLV Czech s.r.o.
V Sedlci 28/17, 160 00 Praha 6 - Sedlec
Czech Republic | +420 739 282 151 | info@cz.slv.com

SLV France S.A.S.
88 rue Henri Dépagneux, ZAC du Martelet - Bât B, 69400 Limas
France | +33 4 74 02 71 20 | infofr@slv.com

SLV Italia s.r.l.
Via Lecco, 19/D, 23896 Bevera di Sirtori (LC)
Italy | +39 039 5983575 | infoit@slv.com

SLV Nederland BV
Sint Jansweg 15, 5928 RC Venlo
The Netherlands | +31 773204343 | info.nl@slv.com

SLV Poland sp. z o.o. ul.
Aleje Jerozolimskie 200, 02-486 Warsaw
Poland | +48 22 722-49-75 | slv@slv.pl

SLV Portugal, LDA.
Rua Margarida de Abreu N°15 - B, Casal Vistoso, 1900-410 Lisboa
Portugal | +351 210 185 961 | info@pt.slv.com

SLV d.o.o.
Barjanska cesta 50, 1000 Ljubljana
Slovenia | +386 1 2009 730 | info.si@slv.com

Soluciones Luminotécnicas Visuales, S.L.
Antic Camí Ral de Valencia, 38, L17, 8860 Castelldefels Barcelona
Spain | +34 931 168 161 | info@slv.es

SLV Swiss SA
Route du Bey 6, 1847 Rennaz
Switzerland | +41 218113232 | info@slv-swiss.ch

SLV Lighting UK Ltd.
Knightsbridge House, Unit 15, Humphrys Road,
Woodside Industrial Estate, Dunstable LU5 4TS
UK | +44 (0)203 968 11 00 | info@uk.slv.com

SLV Nordics
Daimlerstraße 21-23, 52531 Übach-Palenberg
Germany | +46 70 854 9770 | info@nordics.slv.com



slv.com