



VI
MTB

Tableau des tailles

S I Z E C H A R T

Comment choisir la taille de votre vélo ?

La taille d'un vélo dépend en premier lieu de la taille du cadre, même s'il est ensuite possible d'ajuster légèrement en combinant longueur de potence, sortie et recul de selle. Pour choisir son vélo, il faut se demander quelle taille de cadre de vélo vous convient le mieux en fonction de votre morphologie et de votre pratique.

Vous pouvez vérifier la taille de votre vélo à l'aide des chiffres que nous vous donnons à titre indicatif. Si vous hésitez entre deux tailles, merci de vous adresser à votre détaillant qui pourra vous guider dans votre choix en fonction de votre morphologie.

How do I choose the right size ?

The size of a bike depends first and foremost on the size of the frame, even if it's possible to adjust certain components such as the seatpost, the stem and the position of the saddle to fine-tune your set-up. To choose the correct frame size, you'll need to know your style of riding and the kind of bike you're interested in.

The following recommendations will help you choose the right size. If you are hesitating between two sizes, please see your local authorized Lapierre dealer who can help you pick the frame that will be best adapted to your morphology.

SIZE	XS	S	M	L	XL
Spicy	-	1.55 • 1.70	1.70 • 1.80	1.78 • 1.88	>1.86
Zesty AM	-	1.55 • 1.70	1.70 • 1.80	1.78 • 1.88	>1.86
Zesty TR	>1.50	1.55 • 1.70	1.70 • 1.80	1.78 • 1.88	>1.86
XRM	-	1.55 • 1.70	1.70 • 1.80	1.78 • 1.88	>1.86
XR	-	1.50 • 1.70	1.68 • 1.78	1.76 • 1.86	>1.84
Prorace CF	<1.50	1.50 • 1.70	1.68 • 1.78	1.68 • 1.78	>1.84
Prorace	<1.50	1.50 • 1.70	1.68 • 1.78	1.68 • 1.78	>1.84
Edge 29"	-	1.50 • 1.70	1.70 • 1.80	1.78 • 1.88	>1.84
Edge 27"	1.45 • 1.55	1.55 • 1.70	1.68 • 1.78	-	-

WOMEN Series

Edge W	1.45 • 1.55	1.35 • 1.55	1.50 • 1.65	-	-
--------	-------------	-------------	-------------	---	---

Technologies VTT

M T B T E C H N O L O G I E S



LP BOX

Dans un soucis d'intégration et de fonctionnalité, la LP Box située à côté du BB vous permet d'y loger une chambre à air et autres objets utiles en cas de dépannage afin que vous puissiez piloter tout en légèreté.

To ensure integration and functionality, the LP Box by the BB lets you stow a tube and other useful items in case of breakdown, so you can ride unencumbered.



TDT (TRAPDOOR TECHNOLOGY)

Ce brevet déposé par Lapierre permet le placement de la batterie Di2 dans le cadre au niveau du boîtier de pédalier. Facilement accessible via un cache de protection, cette technologie possède un double avantage : elle facilite la vie des mécaniciens et permet également d'abaisser le centre de gravité avec un poids au plus près du sol.

This Lapierre patent pending Technology integrates the Di2 battery neatly in the frame. With a quick and easy trap door to access, TDT makes the mechanics job faster and lowers the centre of gravity, making pedalling more efficient.



POWERBOX TECHNOLOGY

La technologie PowerBox englobe le tube diagonal, le boîtier de pédalier et les bases arrières comme un ensemble dédié à la performance. Une rigidité latérale accrue pour un maximum de réactivité, une transmission maximale de la puissance de pédalage, que ce soit sur des accélérations franches, en montée ou en sprint.

Power Box technology is made up of the down tube, bottom bracket shell and chainstays, which comprise one performance-dedicated whole. Increased lateral stiffness for maximum responsiveness and best possible pedal-power transfer, whether during bursts of acceleration, climbs or sprints.



TECHNOLOGIE ALUMINIUM

Le choix du matériau de votre cadre est déterminant pour les performances de votre vélo. Nous travaillons sans relâche pour perfectionner nos cadres en aluminium. En travaillant avec les meilleurs spécialistes de l'industrie, nous avons créé un alliage très haut de gamme : Alloy Supreme. 3 niveaux de résistance et de poids. Le Supreme 6, 12% plus résistant et 1,5% plus léger que l'aluminium Alu 7005, c'est un alliage d'une longévité exceptionnelle.

The material chosen for your frame is critical to your bike's performance. We work tirelessly to perfect our aluminium frames. Working with the best specialists in the industry, we have created our very high-end Alloy Supreme. It has three levels of strength and weight. Supreme 6 is 12% stronger and 1.5% lighter than Alu 7005 aluminium. It is an exceptionally durable alloy.



LIGHT : +
RESISTANCE : +



LIGHT : ++
RESISTANCE : ++



LIGHT : +++
RESISTANCE : +++



TECHNOLOGIE CARBON

Chez Lapierre, nous utilisons 4 types de fibres distinctes avec des caractéristiques qui leur sont propres. En utilisant ces différentes fibres, nos ingénieurs sont en mesure d'adapter la rigidité, la souplesse et la résistance nécessaires aux zones du cadre directement concernées. La fibre Haute Résistance est celle dont vous aurez besoin pour l'absorption et le confort : tige de selle, bases, haubans voire même un cadre tout entier, tandis que la fibre Très Haut Module sera d'une efficacité et d'une rigidité à toute épreuve. Les fibres que nous utilisons : Haute résistance (24 tonnes), module intermédiaire (30 tonnes), haut module (40 tonnes) et très haut module (46 tonnes).

We at Lapierre use four distinct fibre types, each with its own characteristics. Our engineers can use these different fibres to adapt the stiffness, flex and strength needed for the parts of the frame in question. High-strength fibre is what you will need for shock absorption and comfort: seatpost, chainstays, seatstays or even the whole frame. Very high-modulus, meanwhile, will have unyielding stiffness and efficiency. In our MTBs, we use 4 different type of fibres and we know how to get the best of each one: high resistance (24 tons), intermediate modulus (30 tons), high modulus (40 tons) and very high modulus (46 tons).



TAILLE DE ROUE

Le bon diamètre pour la bonne pratique. Les différentes tailles de roues de nos VTT nous permettent de vous fournir le meilleur vélo en fonction de votre pratique, de vos terrains favoris, de votre gabarit. Le 29" est l'arme absolue pour la compétition en cross-country car il prodigue une stabilité et une adhérence accrues à grande vitesse sur les passages techniques, mais aussi en descente, grâce à une surface au sol du pneu supérieure. Le 27.5", idéalement adapté au all-mountain et à l'enduro, représente le parfait compromis entre maniabilité, nervosité et franchissement. Le 27.5+ est plus ludique et plus sécurisant du fait de son confort et de son adhérence supérieurs, notamment au freinage. Ce standard est parfaitement adapté aux VTT à assistance électrique ainsi qu'aux VTT de notre gamme sport.


The right diameter for the right discipline. Our different MTB wheel sizes enable us to provide you with the best bike for the way you ride, for your favourite terrain and for your build. The 29" is the ultimate weapon for X-country competition and trails because it boasts increased stability and grip at high speeds for technical sections and downhills, thanks to the tire's greater surface area. Perfectly suited to all-mountain and enduro, the 27.5" represents the perfect compromise between handling, responsiveness and rollover. The 27.5+ is more fun and reassuring because of its better comfort and grip, particularly when braking. This standard is perfectly suited to power-assisted MTBs and to MTBs from our sport range.

Spicy



Géométrie

GEOMETRY

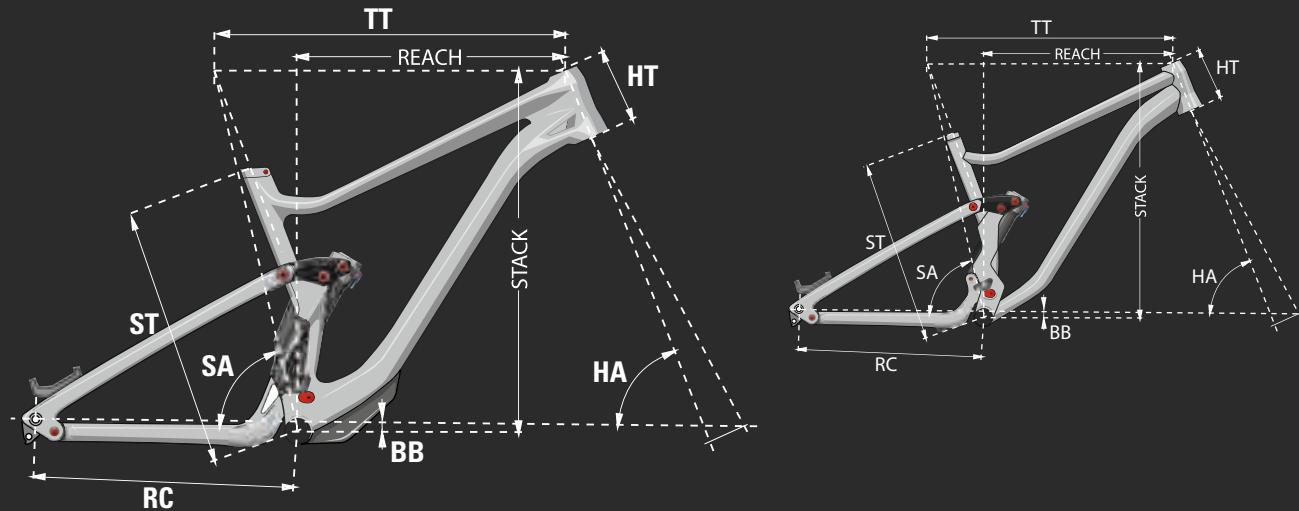

CARBON

SPICY CF TEAM
SPICY CF 7.9
SPICY CF 6.9

ALLOY

SPICY 4.9

SIZE	S	M	L	XL
ST (mm)	400	430	460	500
TT (mm)	573	610	639	668
HA (°)	64,5	65	65	65
SA (°)	75	74,5	74,5	74,5
RC (mm)	425	433	433	433
HT (mm)	90	105	120	135
BB (mm)	-15	-28	-28	-28
Frk Travel	170	170	170	170
Frk Length	580	570	570	570
Frk Offset	44	44	44	44
Stack	602	622	636	649
Reach	415	440	465	490
WB	1163	1195	1227	1258

User	S 155-170	M 170-180	L 178-188	XL >186
Ref.	LS_N_400	LS_N_430	LS_N_460	LS_N_500



Illustrations non-contractuelles. Non-binding illustrations.

Spicy CF Team

 ENDURO

Ref. ➔ LSDNA

✓ Cadre - Frame	Spicy Full carbon Ultimate 170mm travel (29"), pressfit, boost, metric, thru axle
↳ Fourche - Fork	RockShox ZEB Ultimate Charger 2.1 RC2 29" boost DebonAir™ 170mm (29") (Signature Colorway Slab Grey)
↗ Amortisseur - Shock	RockShox Super Deluxe Air Ultimate RCT Trunnion 205x60
↳ Dérailleur arrière - Rear derailleur	SRAM X01 Eagle carbon, 12s
↳ Pédalier - Crankset	SRAM Descendant carbon Eagle boost 148 Dub 12s 32T 170mm (S, M, L) / 175mm (XL)
➡ Boîtier pédalier - Bottom bracket	Dub Press Fit MtB 92
● Cassette - Sprocket	SRAM XG1275 Eagle 10-50T 12s
⌞ Chaîne - Chain	SRAM XX1 Eagle Rainbow 12s
↗ Freins - Brakes	SRAM CODE RSC Rainbow 4 pistons
● Disques - Rotors	SRAM Centerline Rounded 200mm Center Lock (Front & Rear)
↳ Manettes - Shiftlevers	SRAM X01 Eagle MatchMaker 12s
⌚ Jeu de direction - Headset	FSA Orbit Zero stack
⌞ Cintre - Handlebar	Race Face SixC carbon custom Stealth color Ø31.8mm, Width: 785mm - Rise: 20mm
● Poignées - Grips	Lapierre "Fit" grips, small size (S/M), large size (L/XL)
➡ Potence - Stem	Lapierre Full CNC alloy, 0°, L: 35mm (S) 40mm (M) 45mm (L/XL)
↳ Tige de selle - Seatpost	RockShox Reverb with 1X Remote, travel: 125mm (S), 150mm (M/L/XL)
— Selle - Saddle	Lapierre Crmo by Velo
● Roues complètes - Wheelset	ZIPP 3ZERO MOTO Carbon with TyreWiz, 32H, Boost Tubeless ready, Chrome logo (6 bolts)
○ Pneus - Tires	Schwalbe, front: Magic Mary 62-622, Super Trail, Addix Ultra Soft, 50EPI, TR (29") rear: Big Betty 62-622, Super Trail, Addix Soft, 50EPI, TR
↳ Pédales - Pedals	NW-91K
& Accessoires - Accessories	Valves + Thru axle Bottle opener lever



Illustrations non contractuelles. Non-binding illustrations.

Spicy CF 7.9

 ENDURO

Ref. → LSCNA

↗ Cadre - Frame	Spicy Full carbon Ultimate 170mm travel (29"), pressfit, boost, metric, thru axle
↖ Fourche - Fork	Fox 38 Float Factory Kashima Grip 2 boost 15x110 170mm (29")
↗ Amortisseur - Shock	Fox DHX2 Factory Series 2-position Adjust lever Trunnion 205x62,5 spring rate: 350(S) 400(M) 450(L) 500(XL)
↘ Dérailleur arrière - Rear derailleur	Shimano XT M8100, 12s Shadow +
↗ Pédalier - Crankset	Shimano XT M8120 32T 165mm/ (S) / 170mm (M/L) / 175mm (XL)
↗ Boîtier pédalier - Bottom bracket	Shimano BBMT800 Press Fit
◎ Cassette - Sprocket	Shimano CS-Deore 10-51T 12s
↗ Chaîne - Chain	Shimano Deore 12s
↗ Freins - Brakes	Shimano XT M8120 4 Pistons
◎ Disques - Rotors	Shimano MT800 203mm Center Lock (Front & Rear)
↗ Manettes - Shiftlevers	Shimano SLX M7100 12s
↗ Jeu de direction - Headset	FSA Orbit Zero stack
↗ Cintre - Handlebar	Lapierre alloy 6061DB Ø31.8mm, Width: 760mm - Rise: 15mm (S/M), Width: 780mm - Rise: 30mm (L/XL)
↗ Poignées - Grips	Lapierre "Fit" grips, small size (S/M), large size (L/XL)
↗ Potence - Stem	Lapierre Full CNC alloy, 0°: 35mm (S) 40mm (M) 45mm (L/XL)
↖ Tige de selle - Seatpost	JD dropper "Rad travel adjust", travel: 125mm (S), 150mm (M), 170mm (L/XL)
↖ Selle - Saddle	Lapierre Crmo by Velo
◎ Roues complètes - Wheelset	DT Swiss EX1700 SPLINE 30c, 28H, Custom stickers, boost tubeless ready (Center Lock - Microspline body)
○ Pneus - Tires	Schwalbe, front: Magic Mary 62-622, Super Trail, Addix Ultra Soft, 50EPI, TR (29") rear: Big Betty 62-622, Super Trail, Addix Soft, 50EPI, TR
↗ Pédales - Pedals	NW-91K
& Accessoires - Accessories	Valves + Thru axle Bottle opener lever



Illustrations non-contractuelles. Non-binding illustrations.

Spicy CF 6.9

 ENDURO

Ref. ➔ LSBNA

✓ Cadre - Frame	Spicy Full carbon Ultimate 170mm travel (29"), pressfit, boost, metric, thru axle
↳ Fourche - Fork	Fox 38 Float Performance boost 15x110 170mm (29")
↗ Amortisseur - Shock	Fox DHX Performance 2-position Adjust lever Trunnion 205x62,5 spring rate: 350(S) 400(M) 450(L) 500(XL)
⚡ Dérailleur arrière - Rear derailleur	SRAM GX Lunar Eagle, 12s
☛ Pédalier - Crankset	SRAM Descendant 7K Eagle boost 148 Dub 12s 32T 165mm (S) / 170mm (M/L) / 175mm (XL)
☞ Boîtier pédalier - Bottom bracket	Dub Press Fit MtB 92
● Cassette - Sprocket	SRAM PG1210 Eagle 11-50 12s
↶ Chaîne - Chain	SRAM SX Eagle 12s
✗ Freins - Brakes	SRAM G2 R Diffusion Black 4 pistons
● Disques - Rotors	SRAM Centerline Rounded 200mm Center Lock (Front & Rear)
☛ Manettes - Shiftlevers	SRAM NX Eagle MatchMaker 12s
⌚ Jeu de direction - Headset	FSA Orbit Zero stack
↷ Cintre - Handlebar	Lapierre alloy 6061DB Ø31.8mm, Width: 760mm - Rise: 15mm (S/M), Width: 780mm - Rise: 30mm (L/XL)
● Poignées - Grips	Lapierre "Fit" grips, small size (S/M), large size (L/XL)
➡ Potence - Stem	Lapierre Full CNC alloy, 0°, L: 35mm (S) 40mm (M) 45mm (L/XL)
↖ Tige de selle - Seatpost	Lapierre dropper by JD, travel: 130mm(S/M), 150mm (L/XL)
▬ Selle - Saddle	Lapierre Crmo by Velo
●● Moyeu avant - Front hub	Lapierre DA813, 2 Sealed Bearing , boost 15x110, 32H
●● Moyeu arrière - Rear hub	Lapierre DA813, 4 sealed bearings, boost 12x148, 32H
□ Jantes - Rims	Mavic EX630 32H, tubeless ready
○ Pneus - Tires	Maxxis, front: Assegai EXO TR, 29x2.50WT, 3C Maxxterra, 60TPI, TR (29") rear: Minion DHR II EXO TR, 29x2.40WT, 60TPI, TR
☛ Pédales - Pedals	NW-91K
& Accessoires - Accessories	Tubeless flap + valves + Thru axle Bottle opener lever



Illustrations non contractuelles. Non-binding illustrations.

Spicy 4.9

ENDURO

Ref. ➔ LSANA

✓ Cadre - Frame	Spicy Fit Supreme 6 alloy 170mm travel (29"), pressfit, boost, metric, thru axle
¶ Fourche - Fork	RockShox ZEB R Charger R 29" boost DebonAir™ 170mm (29")
↗ Amortisseur - Shock	RockShox Super Deluxe coil Select R Trunnion 205x62,5 spring rate: 300(S) 350(M) 400(L) 450(XL)
⚡ Dérailleur arrière - Rear derailleur	SRAM GX Lunar Eagle, 12s
☛ Pédalier - Crankset	SRAM Descendant 7K Eagle boost 148 Dub 12s 32T 165mm (S) / 170mm (M/L) / 175mm (XL)
☞ Boîtier pédalier - Bottom bracket	Dub Press Fit MtB 92
◎ Cassette - Sprocket	SRAM PG1210 Eagle 11-50 12s
⌚ Chaîne - Chain	SRAM SX Eagle 12s
➤ Freins - Brakes	SRAM G2 R Diffusion Black 4 pistons
● Disques - Rotors	SRAM Centerline Rounded 200mm Center Lock (Front & Rear)
☛ Manettes - Shiftevers	SRAM NX Eagle MatchMaker 12s
⌚ Jeu de direction - Headset	FSA Orbit Zero stack
↷ Cintre - Handlebar	Lapierre alloy 6061DB Ø31.8mm, Width: 760mm - Rise: 15mm (S/M), Width: 780mm - Rise: 30mm (L/XL)
☛ Poignées - Grips	Lapierre "Fit" grips, small size (S/M), large size (L/XL)
➡ Potence - Stem	Lapierre Full CNC alloy, 0°, L: 35mm (S) 40mm (M) 45mm (L/XL)
↖ Tige de selle - Seatpost	Lapierre dropper by JD, travel: 130mm(S/M), 150mm (L/XL)
▬ Selle - Saddle	Lapierre Crmo by Velo
● Moyeu avant - Front hub	Lapierre DA813, 2 Sealed Bearing , boost 15x110, 32H
● Moyeu arrière - Rear hub	Lapierre DA813, 4 sealed bearings, boost 12x148, 32H
☒ Jantes - Rims	Mavic EX630 32H, tubeless ready
○ Pneus - Tires	Maxxis, front Assegai EXO TR, 29x2.50WT, 3C Maxxterra, 60TPI, TR (29") rear: Minion DHR II EXO TR, 29x2.40WT, 60TPI, TR
☛ Pédales - Pedals	NW-91K
& Accessoires - Accessories	Tubeless flap + valves + Thru axle Bottle opener lever



Alloy Suprême 6




Zesty AM



Géométrie

GEOMETRY

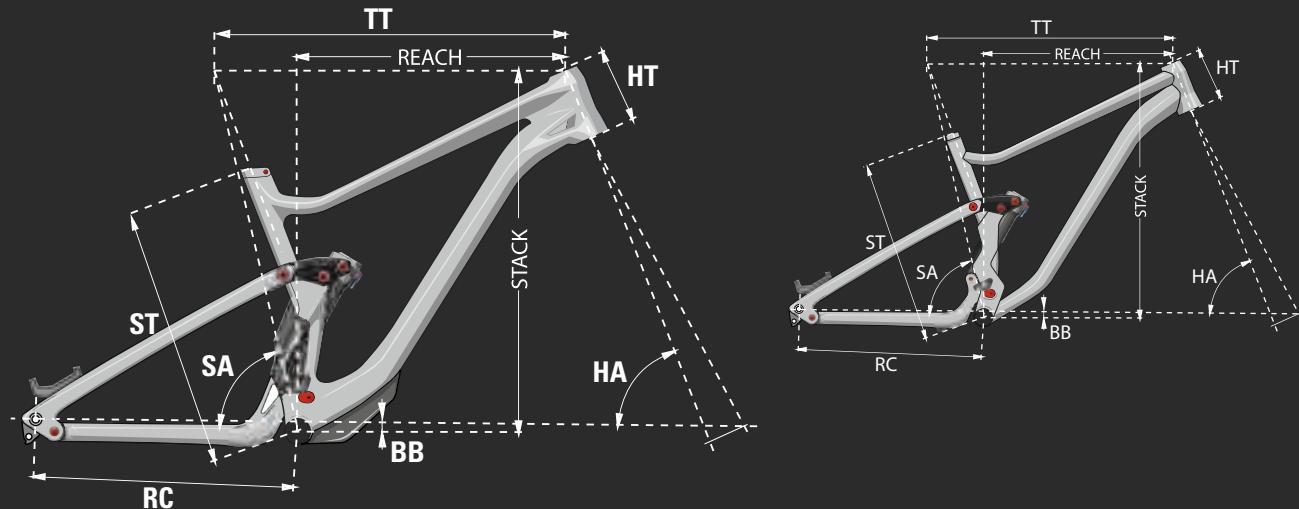

CARBON

ZESTY AM CF 8.9
ZESTY AM CF 7.9

ALLOY

ZESTY AM 5.9
ZESTY AM 4.9

SIZE	S	M	L	XL
ST (mm)	400	430	460	500
TT (mm)	573	610	639	668
HA (°)	64,5	65	65	65
SA (°)	75	74,5	74,5	74,5
RC (mm)	425	433	433	433
HT (mm)	90	105	120	135
BB (mm)	-15	-28	-28	-28
Frk Travel	170	170	170	170
Frk Length	580	570	570	570
Frk Offset	44	44	44	44
Stack	602	622	636	649
Reach	415	440	465	490
WB	1163	1195	1227	1258

User	S 155-170	M 170-180	L 178-188	XL >186
Ref.	LZ_N_400 E27_4000	LZ_N_430 E27_4300	LZ_N_460 E27_4600	LZ_N_500 E27_5000



Illustrations non-contractuelles. Non-binding illustrations.

Zesty AM CF 8.9

ALL MOUNTAIN

Ref. → LZJNA

	Cadre - Frame	Zesty AM Full carbon Ultimate 150mm travel (29"), pressfit, boost, metric, thru axle
	Fourche - Fork	Fox 36 Factory Kashima boost FIT4 150mm (29") 44mm rake
	Amortisseur - Shock	Fox Float X Factory Kashima Trunnion LV Evol 205x57.5mm (Trunnion type)
	Dérailleur arrière - Rear derailleur	Shimano Deore XT RD-M8100, 12s
	Pédalier - Crankset	Shimano DeoreXT (8120) / 12s 32T 165mm (S) / 170mm (M) / 175mm (L/XL) Shimano
	Boîtier pédalier - Bottom bracket	BBMT800 Press Fit
	Cassette - Sprocket	Shimano Deore CS-M6100 10-51T 12s
	Chaîne - Chain	Shimano Deore 12s (CN-M6100)
	Freins - Brakes	Shimano XT B-LM 8100/BR8120 4 pistons
	Disques - Rotors	Shimano SMRT 76 203mm/180mm
	Manettes - Shifters	Shimano Deore M6100 12s
	Jeu de direction - Headset	FSA Orbit Zero stack
	Cintre - Handlebar	Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, (S/M), Width: 780mm, Rise: 30mm (L/XL), Ø: 31.8mm bar bore
	Poignées - Grips	Lapierre "Fit" grips, S/M: small size, L/XL: large size
	Potence - Stem	Lapierre Full CNC alloy, 0°, L: 40mm (S), 45mm (M), 50mm (L/XL)
	Tige de selle - Seatpost	JD dropper "Rad travel adjust", Ø: 31.6mm, travel: 125mm (S), 150mm (M), 170mm (L/XL)
	Selle - Saddle	Lapierre Crmo by Velo
	Roues complètes - Wheelset	Lapierre AM carbon 29"x30c, boost, Microspline driver
	Pneus - Tires	Maxxis, front: ASSEGAI 3C MaxxTerra/EXO+/TR 29X2.50 Wide Trail 29x2.5 rear: Minion DHR Wide Trail 29x2.4
	Pédales - Pedals	NW-91K
	Accessoires - Accessories	Tubeless flap + valves + Thru axle Bottle opener lever



Illustrations non contractuelles. Non-binding illustrations.

Zesty AM CF 7.9

ALL MOUNTAIN

Ref. → LZINA

✓ Cadre - Frame	Zesty AM Full carbon Ultimate 150mm travel (29"), pressfit, boost, metric, thru axle
¶ Fourche - Fork	Fox 36 Performance Float 3 Pos Micro Adj lever 150mm 29" 44mm rake
↗ Amortisseur - Shock	Fox Float DPS Performance Float 3-position lever, LV Evol 205x57.5mm (Trunnion type)
⚡ Dérailleur arrière - Rear derailleur	SRAM New GX Lunar Eagle, 12s
☛ Pédalier - Crankset	SRAM GX Lunar Eagle boost 148 Dub 12s 32T 165mm (S) / 170mm (M) / 175mm (L/XL)
☞ Boîtier pédalier - Bottom bracket	Sram DUB Pressfit MTB 92
◎ Cassette - Sprocket	SRAM PG1210 Eagle 11-50 12s
⌚ Chaîne - Chain	SRAM SX Eagle 12s
➤ Freins - Brakes	SRAM G2 R Gloss black 4 pistons
● Disques - Rotors	SRAM Centerline Rounded 200mm/180mm
☛ Manettes - Shiftlevers	SRAM NX Eagle 12s
⌚ Jeu de direction - Headset	FSA Orbit Zero stack
☛ Cintre - Handlebar	Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, (S/M), Width: 780mm, Rise: 30mm (L/XL), Ø: 31.8mm bar bore
⌚ Poignées - Grips	Lapierre "Fit" grips, S/M: small size, L/XL: large size
➡ Potence - Stem	Lapierre Full CNC alloy, 0°: 40mm (S), 45mm (M), 50mm (L/XL)
↖ Tige de selle - Seatpost	Lapierre dropper by JD, travel: 100mm (S), 130mm (M), 150mm (L/XL)
▬ Selle - Saddle	Lapierre Crmo by Velo
● Moyeu avant - Front hub	Lapierre by Fastace DF813 , boost 15x110, 32H
● Moyeu arrière - Rear hub	Lapierre by Fastace DR813, 4 sealed bearings, boost 12x148, 32H
☒ Jantes - Rims	Rodi Tryp 30 tubeless ready, 30-622 (29")
○ Pneus - Tires	Maxxis, front: ASSEGAI 3C MaxxTerra/EXO+/TR 29X2.50 Wide Trail 29x2.5 rear: Minion DHR Wide Trail 29x2.4
☛ Pédales - Pedals	NW-91K
& Accessoires - Accessories	Tubeless flap + valves + Thru axle Bottle opener lever

 Carbon Ultimate

 1x12 Speed

 29"



Illustrations non-contractuelles. Non-binding illustrations.

Zesty AM 5.9

ALL MOUNTAIN

Ref. → E272

✓ Cadre - Frame	Zesty AM Supreme 5 alloy 150mm travel (29"), pressfit, boost, metric, thru axle
↳ Fourche - Fork	RockShox Revelation RC Motion Control boost 150mm (29")
↗ Amortisseur - Shock	RockShox Deluxe Select + 205x57.5mm DebonAir - Trunnion type
⚡ Dérailleur arrière - Rear derailleur	SRAM New GX Lunar Eagle, 12s
☒ Pédalier - Crankset	Truvativ Descendant 6K alloy Eagle boost 148 Dub 12s 32T 165mm (S) / 170mm (M) / 175mm (L/XL)
➡ Boîtier pédalier - Bottom bracket	Sram DUB Pressfit MTB 92
◎ Cassette - Sprocket	SRAM PG1210 Eagle 11-50 12s
↶ Chaîne - Chain	SRAM SX Eagle 12s
↗ Freins - Brakes	SRAM G2 R Gloss black 4 pistons
● Disques - Rotors	SRAM Centerline Rounded 200mm/180mm
↖ Manettes - Shiftlevers	SRAM NX Eagle 12s
⌚ Jeu de direction - Headset	FSA Orbit Zero stack
↔ Cintre - Handlebar	Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, (S/M), Width: 780mm, Rise: 30mm (L/XL), Ø: 31.8mm bar bore
☞ Poignées - Grips	Lapierre "Fit" grips, S/M: small size, L/XL: large size
➡ Potence - Stem	Lapierre Full CNC alloy, 0°, L: 40mm (S), 45mm (M), 50mm (L/XL)
↖ Tige de selle - Seatpost	Lapierre dropper by JD, travel: 100mm (S), 130mm (M), 150mm (L/XL)
↔ Selle - Saddle	Lapierre Crmo by Velo
● Moyeu avant - Front hub	Lapierre by Fastace DF813 , boost 15x110, 32H
● Moyeu arrière - Rear hub	Lapierre by Fastace DR813, 4 sealed bearings, boost 12x148, 32H
▷ Jantes - Rims	Rodi Tryp 30 tubeless ready, 30-622 (29")
○ Pneus - Tires	Maxxis, front: High Roller II Wide Trail 29x2.5 rear: Minion DHR Wide Trail 29x2.4
⚡ Pédales - Pedals	NW-91K
& Accessoires - Accessories	Tubeless flap + valves + Thru axle Bottle opener lever



Alloy Suprême 5



1x12 Speed



29"



Illustrations non contractuelles. Non-binding illustrations.

Zesty AM 4.9

ALL MOUNTAIN

Ref. → E271

✓ Cadre - Frame	Zesty AM Supreme 5 alloy 150mm travel (29"), pressfit, boost, metric, thru axle
¶ Fourche - Fork	RockShox 35 Gold RL boost , 150mm (29")
↗ Amortisseur - Shock	Lapierre AF2 Air Trunnion metric Rebound & Lockout (205x57.5mm)
⚡ Dérailleur arrière - Rear derailleur	Shimano Deore RD-M6100, 12s
☛ Pédalier - Crankset	Shimano FC-M510 12s 32T 170mm (S/M/L) / 175mm (XL)
☞ Boîtier pédalier - Bottom bracket	Shimano BBMT800 Press Fit
◎ Cassette - Sprocket	Shimano Deore CS-M6100 10-51T 12s
⌚ Chaîne - Chain	Shimano Deore 12s (CN-M6100)
➤ Freins - Brakes	Shimano MT401 4 pistons
● Disques - Rotors	Shimano SM-RT30 203mm/180mm
☛ Manettes - Shiftevers	Shimano Deore M6100 12s
⌚ Jeu de direction - Headset	FSA Orbit Zero stack
↖ Cintre - Handlebar	Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, (S/M), Width: 780mm, Rise: 30mm (L/XL), Ø: 31.8mm bar bore
⌚ Poignées - Grips	Lapierre "Fit" grips, S/M: small size, L/XL: large size
➡ Potence - Stem	Lapierre Full CNC alloy, 0°: 40mm (S), 45mm (M), 50mm (L/XL)
↖ Tige de selle - Seatpost	Lapierre dropper by JD, travel: 100mm (S), 130mm (M), 150mm (L/XL)
→ Selle - Saddle	Lapierre Crmo by Velo
● Moyeu avant - Front hub	Shimano MT400, boost 15x110, 32H Center Lock
● Moyeu arrière - Rear hub	Shimano MT400, boost 12x148, 32H Center Lock
☒ Jantes - Rims	Rodi Tryp 30 tubeless ready, 30-622 (29")
○ Pneus - Tires	Maxxis High Roller II 29x2.30, 60TPI, EXO, TR (front and rear)
☛ Pédales - Pedals	NW-91K
& Accessoires - Accessories	Tubeless flap + valves + Thru axle Bottle opener lever



Alloy Suprême 5



1x12 Speed




29"

Zesty TR



Géométrie

GEOMETRY

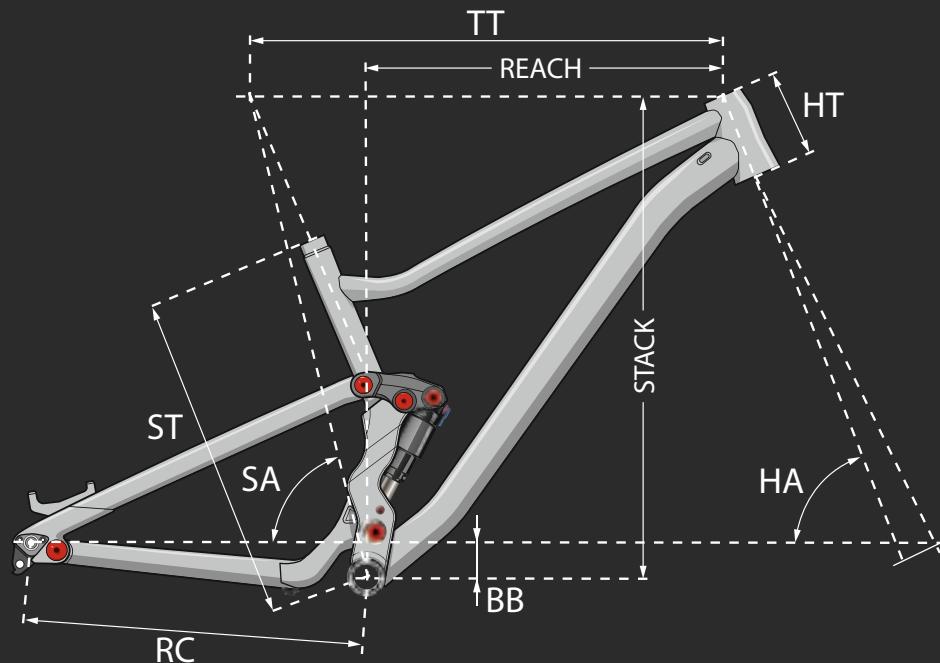

SIZE	XS	S	M	L	XL
ST (mm)	370	390	430	470	510
TT (mm)	546	591	613	633	655
HA (°)	66,5	66	66	66	66
SA (°)	74	74,5	75	75,5	76
RC (mm)	425	428	428	428	428
HT (mm)	95	100	110	120	130
BB (mm)	-25	-40	-40	-35	-35
Reach	385	425	450	475	500
Stack	561	598	608	612	621
User	>150	150-170	168-178	176-186	>184
Ref.	E2193700	E22_3900	E22_4300	E22_4700	E22_5100



Illustrations non-contractuelles. Non-binding illustrations.

Zesty TR 5.9

~~~ TRAIL

Ref. → E222

|  |                                      |                                                                                 |
|--|--------------------------------------|---------------------------------------------------------------------------------|
|  | Cadre - Frame                        | Zesty TR Supreme 5 alloy 120mm travel (29"), pressfit, boost, metric, thru axle |
|  | Fourche - Fork                       | Fox Rythm 34 Float 2 Pos /remote boost 130mm (29")                              |
|  | Amortisseur - Shock                  | Fox Float DPS Performance 3-position lever, LV Evol 165x45mm Trunnion           |
|  | Dérailleur arrière - Rear derailleur | SRAM GX Lunar Eagle, 12s                                                        |
|  | Pédalier - Crankset                  | SRAM GX Lunar Eagle boost 148 Dub 12s 32T 165mm (S) / 170mm (M/L) / 175mm (XL)  |
|  | Boîtier pédalier - Bottom bracket    | Sram DUB Pressfit MTB 92                                                        |
|  | Cassette - Sprocket                  | SRAM PG1210 11-50T 12s                                                          |
|  | Chaîne - Chain                       | SRAM SX Eagle 12s                                                               |
|  | Freins - Brakes                      | SRAM G2 R Gloss black 4 pistons                                                 |
|  | Disques - Rotors                     | SRAM Centerline Rounded 200mm/180mm                                             |
|  | Manettes - Shiftlevers               | SRAM NX Eagle12s                                                                |
|  | Jeu de direction - Headset           | FSA Orbit Zero stack                                                            |
|  | Cintre - Handlebar                   | Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm bar bore             |
|  | Poignées - Grips                     | Lapierre "Fit" grips, S/M: small size, L/XL: large size                         |
|  | Potence - Stem                       | Lapierre Full CNC, 0°, L: 45mm (S/M), 50mm (L), 55mm (XL)                       |
|  | Tige de selle - Seatpost             | Lapierre dropper by JD, travel: 80mm (S), 100mm (M), 130mm (L/XL)               |
|  | Selle - Saddle                       | Selle Royal Vivo                                                                |
|  | Moyeu avant - Front hub              | Lapierre by Fastace DF813, boost 15x110, 32H                                    |
|  | Moyeu arrière - Rear hub             | Lapierre by Fastace DR813, 4 sealed bearings, boost 12x148, 32H                 |
|  | Jantes - Rims                        | Rodi Ryot 29" (25mm wide) tubeless ready, 32H                                   |
|  | Pneus - Tires                        | Maxxis, front: Ardent 29x2.40, EXO, TR / rear: Forekaster 29x2.35, EXO, TR      |
|  | Pédales - Pedals                     | NW-91K                                                                          |
|  | Accessoires - Accessories            | Tubeless flap + valves + Thru axle Bottle opener lever                          |



Alloy Suprême 5



1x12 Speed



29"



Illustrations non contractuelles. Non-binding illustrations.

# Zesty TR 4.9

▲ TRAIL

Ref. → E221

|                                        |                                                                                 |
|----------------------------------------|---------------------------------------------------------------------------------|
| ↗ Cadre - Frame                        | Zesty TR Supreme 5 alloy 120mm travel (29"), pressfit, boost, metric, thru axle |
| ↖ Fourche - Fork                       | RockShox 35 Gold RL boost 130mm (29") W: remote LO                              |
| ↗ Amortisseur - Shock                  | Lapierre AF2 Air Trunnion metric Rebound & Lockout (165x45mm)                   |
| ↗ Dérailleur arrière - Rear derailleur | SRAM GX Lunar Eagle, 12s                                                        |
| ↗ Pédalier - Crankset                  | SRAM NX Eagle boost 148 Dub 12s 32T 165mm (S) / 170mm (M/L) / 175mm (XL)        |
| ↗ Boîtier pédalier - Bottom bracket    | Sram DUB Pressfit MTB 92                                                        |
| ◎ Cassette - Sprocket                  | SRAM PG1210 11-50T 12s                                                          |
| ↗ Chaîne - Chain                       | SRAM SX Eagle 12s                                                               |
| ↗ Freins - Brakes                      | Shimano M4100 4 (front) / 2 (rear) pistons                                      |
| ◎ Disques - Rotors                     | Shimano RT30 203mm/180mm                                                        |
| ↗ Manettes - Shiftevers                | SRAM SX Eagle 12s                                                               |
| ⌚ Jeu de direction - Headset           | FSA Orbit Zero stack                                                            |
| ↖ Cintre - Handlebar                   | Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm bar bore             |
| ↗ Poignées - Grips                     | Lapierre "Fit" grips, S/M: small size, L/XL: large size                         |
| ➡ Potence - Stem                       | Lapierre Full CNC, 0°, L: 45mm (S/M), 50mm (L), 55mm (XL)                       |
| ↖ Tige de selle - Seatpost             | Lapierre dropper by JD, travel: 80mm (S), 100mm (M), 130mm (L/XL)               |
| → Selle - Saddle                       | Selle Royal Vivo                                                                |
| ● Moyeu avant - Front hub              | Lapierre by Fastace DF813, boost 15x110, 32H                                    |
| ● Moyeu arrière - Rear hub             | Lapierre by Fastace DR813, 4 sealed bearings, boost 12x148, 32H                 |
| ↗ Jantes - Rims                        | Rodi Ryot 29" (25mm wide) tubeless ready, 32H                                   |
| ○ Pneus - Tires                        | Maxxis, front: Ardent 29x2.40, EXO, TR / rear: Forekaster 29x2.35, EXO, TR      |
| ↘ Pédales - Pedals                     | NW-91K                                                                          |
| & Accessoires - Accessories            | Tubeless flap + valves + Thru axle Bottle opener lever                          |

Alloy Suprême 5

1x12 Speed

29"



Illustrations non-contractuelles. Non-binding illustrations.

# Zesty TR 3.9

~~~ TRAIL

Ref. → E220

 Cadre - Frame Zesty TR Supreme 5 alloy 120mm travel (29"), pressfit, boost, metric, thru axle

 Fourche - Fork RST FIRST AIR TRL Boost 120mm 29" | OU, OR | Suntour Raidon32 RLR Boost 120mm

 Amortisseur - Shock Lapierre AF2 Air Trunnion metric Rebound & Lockout (165x45mm)

 Dérailleur arrière - Rear derailleur Shimano Deore RD-M5100, 11s

 Pédalier - Crankset Shimano Deore FC-M5100 10/11s 32T 170mm (S/M/L) / 175mm (XL)

 Boîtier pédalier - Bottom bracket Shimano BBMT800 Press Fit

 Cassette - Sprocket Shimano Deore CS-M5100 11-51T 11s

 Chaîne - Chain KMC X11 black/silver 11s

 Freins - Brakes Shimano MT401

 Disques - Rotors Shimano SM-RT30 180mm front/rear

 Manettes - Shiftlevers New Shimano Deore M5100 11s

 Jeu de direction - Headset FSA Orbit Zero stack

 Cintre - Handlebar Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm bar bore

 Poignées - Grips Lapierre DD34 Lock-on

 Potence - Stem Lapierre alloy, 0°, L: 45mm (S/M), 55mm (L/XL)

 Tige de selle - Seatpost Lapierre dropper by JD, travel: 80mm (S), 100mm (M), 130mm (L/XL)

 Selle - Saddle Selle Royal Vivo

 Moyeu avant - Front hub Shimano MT400, boost 15x110, 32H Center Lock

 Moyeu arrière - Rear hub Shimano MT400, boost 12x148, 32H Center Lock

 Jantes - Rims Rodi Ryot 29" (25mm wide) tubeless ready, 32H

 Pneus - Tires Maxxis, front: Ardent 29x2.40, EXO, TR / rear: Forekaster 29x2.35, EXO, TR

 Pédales - Pedals NW-91K

 Accessoires - Accessories Tubeless flap + valves + Thru axle Bottle opener lever

 Alloy Suprême 5

 1x11 Speed

 29"




Illustrations non contractuelles. Non-binding illustrations.

Zesty TR 3.7

~~ TRAIL

Ref. → E219

| | |
|--|---|
| ↗ Cadre - Frame | Zesty TR Supreme 5 alloy 120mm travel (27"), pressfit, boost, metric, thru axle |
| ↖ Fourche - Fork | RST FIRST AIR TRL Boost 120mm 27.5" OU, OR Suntour Raidon32 RLR Boost 120mm |
| ↗ Amortisseur - Shock | Lapierre AF2 Air Trunnion metric Rebound & Lockout (165x45mm) |
| ↗ Dérailleur arrière - Rear derailleur | Shimano Deore RD-M5100, 11s |
| ↗ Pédalier - Crankset | Shimano Deore FC-M5100 10/11s 32T 170mm |
| ↗ Boîtier pédalier - Bottom bracket | Shimano BBMT800 Press Fit |
| ◎ Cassette - Sprocket | Shimano Deore CS-M5100 11-51T 11s |
| ↗ Chaîne - Chain | KMC X11 black/silver 11s |
| ↗ Freins - Brakes | Shimano MT401 |
| ◎ Disques - Rotors | Shimano SM-RT30 180mm front/ear |
| ↗ Manettes - Shiftevers | New Shimano Deore M5100 11s |
| ⌚ Jeu de direction - Headset | FSA Orbit Zero stack |
| ~~ Cintre - Handlebar | Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm bar bore |
| ↗ Poignées - Grips | Lapierre DD34 Lock-on |
| → Potence - Stem | Lapierre alloy, 0°, L: 35mm (S) |
| ↖ Tige de selle - Seatpost | Lapierre dropper by JD, travel: 80mm (XS) |
| → Selle - Saddle | Selle Royal Vivo Women |
| ● Moyeu avant - Front hub | Shimano MT400, boost 15x110, 32H Center Lock |
| ● Moyeu arrière - Rear hub | Shimano MT400, boost 12x148, 32H Center Lock |
| ↗ Jantes - Rims | Rodi Ryot 27,5" (25mm wide) tubeless ready, 32H |
| ○ Pneus - Tires | Maxxis, front: Ardent 27x2.40, EXO, TR / rear: Forekaster 27x2.35, EXO, TR |
| ↗ Pédales - Pedals | NW-91K |
| & Accessoires - Accessories | Valves + Thru axle Bottle opener lever |




XRM



Géométrie

GEOMETRY

XRM 8.9
XRM 6.9

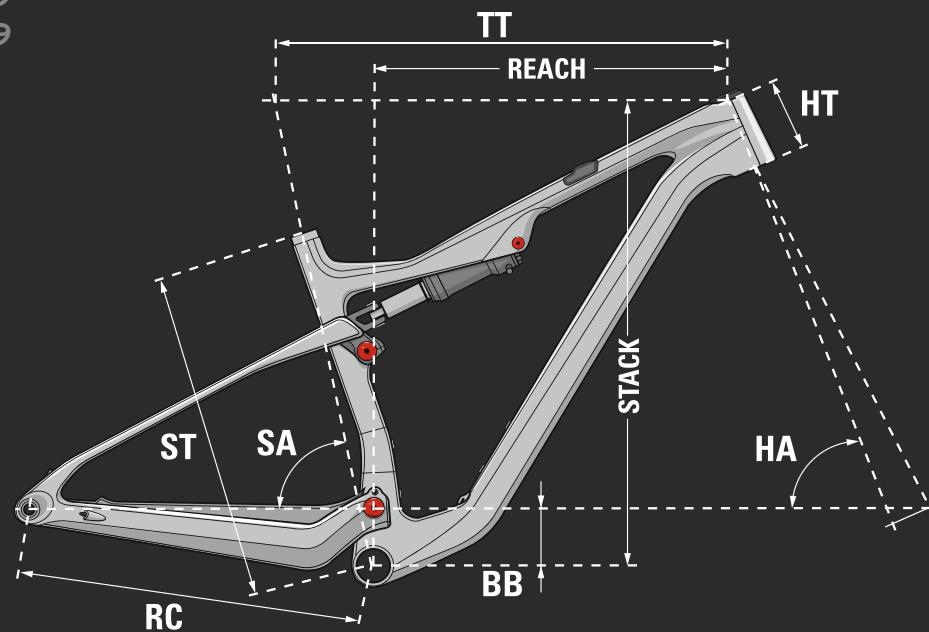


| SIZE | S | M | L | XL |
|-------------------|------|------|------|------|
| ST (mm) | 390 | 430 | 470 | 510 |
| TT (mm) | 575 | 602 | 624 | 651 |
| HA (°) | 66 | 66 | 66 | 66 |
| SA (°) | 74.5 | 74.5 | 74.5 | 74.5 |
| RC (mm) | 435 | 435 | 435 | 435 |
| HT (mm) | 85 | 90 | 100 | 110 |
| BB (mm) | -40 | -40 | -40 | -40 |
| Frk Travel | 120 | 120 | 120 | 120 |
| Frk Length | 531 | 531 | 531 | 531 |
| Frk Offset | 44 | 44 | 44 | 44 |
| Stack | 584 | 589 | 598 | 608 |
| Reach | 415 | 440 | 460 | 485 |
| WB | 1134 | 1162 | 1185 | 1214 |

| | | | | |
|-------------|-----------|-----------|-----------|----------|
| User | S 155-170 | M 170-180 | L 178-188 | XL >186 |
| Ref. | LR_N_390 | LR_N_430 | LR_N_470 | LR_N_510 |

Géométrie

GEOMETRY

XRM 75TH

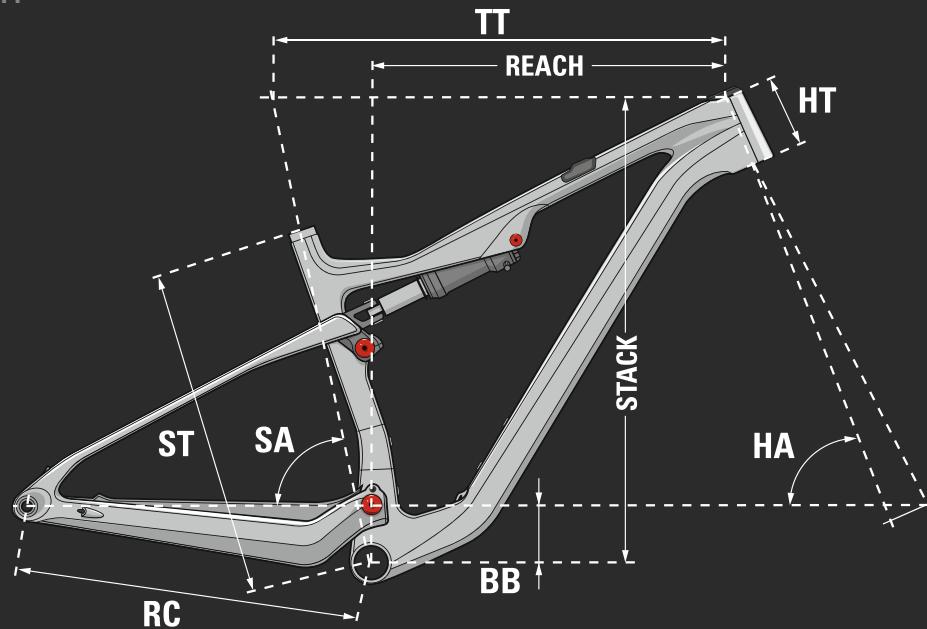

| SIZE | S | M | L | XL |
|-------------------|------|------|------|------|
| ST (mm) | 390 | 430 | 470 | 510 |
| TT (mm) | 575 | 602 | 624 | 651 |
| HA (°) | 66,5 | 66,5 | 66,5 | 66,5 |
| SA (°) | 75 | 75 | 75 | 75 |
| RC (mm) | 435 | 435 | 435 | 435 |
| HT (mm) | 85 | 90 | 100 | 110 |
| BB (mm) | -45 | -45 | -45 | -45 |
| Frk Travel | 110 | 110 | 110 | 110 |
| Frk Length | 517 | 517 | 517 | 517 |
| Frk Offset | 44 | 44 | 44 | 44 |
| Stack | 580 | 584 | 593 | 602 |
| Reach | 420 | 445 | 465 | 490 |
| WB | 1133 | 1161 | 1184 | 1213 |

| | | | | |
|-------------|-----------|-----------|-----------|----------|
| User | S 155-170 | M 170-180 | L 178-188 | XL >186 |
| Ref. | LRGNA390 | LRGNA430 | LRGNA470 | LRGNA510 |



Illustrations non contractuelles. Non-binding illustrations.



XRM 75th

~~ CROSS-COUNTRY | MARATHON

Ref. ➔ LRGNA

| | |
|--|--|
| ↗ Cadre - Frame | NEW XRM full Carbon 110mm travel 29"Team layup, pressfit, boost, metric, thru axle |
| ↳ Fourche - Fork | Fox 34 SC Factory-Series Float 3 Pos /remote boost FIT4 110mm (29") 44mm rake |
| ↗ Amortisseur - Shock | FOX FLOAT DPS, Factory-Series Remote up, Evol LV, 210x55 (Std/Std) |
| ↳ Dérailleur arrière - Rear derailleur | Shimano XTR RD-M9100, 12s |
| ↳ Pédalier - Crankset | Race Face NEXT SL, 12S 32T 170mm (S) / 175mm (M/L/XL) |
| ☞ Boîtier pédalier - Bottom bracket | Shimano pressfit BB-MT800 |
| ◎ Cassette - Sprocket | Shimano XTR CS-M9100 10-51T 12s |
| ☞ Chaîne - Chain | Shimano XTR 12s (CN-M9100) |
| ↗ Freins - Brakes | Shimano XTR 4 pistons |
| ◎ Disques - Rotors | Shimano MT800 180mm/160mm |
| ↗ Manettes - Shiftlevers | Shimano XTR 12s |
| ⌚ Jeu de direction - Headset | "FSA Integrated 1.5ZS IS-2 /42/ACB hidden set |
| ~~ Cintre - Handlebar | Race Face Next SL Carbon, Width: 740mm, Rise: 10mm, Ø: 35mm bar bore |
| ☞ Poignées - Grips | Lapierre "Fit" grips, S/M: small size, L/XL: large size |
| ➡ Potence - Stem | Race Face Turbine R Ø: 35mm, L: 60mm (S/M), 70mm (L/XL) |
| ↖ Tige de selle - Seatpost | Race Face Turbine SL Ti, Ø: 31.6mm, travel: 100mm (all sizes) |
| ~~ Selle - Saddle | PROLOGO DIMENSION NACK |
| ◎ Roues complètes - Wheelset | DT Swiss XRC 1200 Spline 29"*30c Boost Microspline "75th" touch |
| ○ Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 Rear/ Ardent Race 3C Maxxspeed EXO TR 29x2.35 front |
| ☞ Pédales - Pedals | NW-91K |
| & Accessoires - Accessories | Valves + Thru axle Bottle opener lever |



Illustrations non-contractuelles. Non-binding illustrations.

XRM 8.9

~~ CROSS-COUNTRY | MARATHON

Ref. ➔ LRFNA

| | |
|--|--|
| ↗ Cadre - Frame | NEW XRM full Carbon 110mm travel (29"), pressfit, boost, metric, thru axle |
| ↖ Fourche - Fork | Fox 34 SC Factory-Series Float 3 Pos /remote boost FIT4 120mm (29") 44mm rake |
| ↗ Amortisseur - Shock | FOX FLOAT DPS, Factory-Series Remote up, Evol LV, 210x55 (Std/Std) |
| ↘ Dérailleur arrière - Rear derailleur | Shimano Deore XT RD-M8100, 12s |
| ↗ Pédalier - Crankset | Shimano XT M8120 32T 170mm (S) / 175mm (M/L XL) |
| ↗ Boîtier pédalier - Bottom bracket | Shimano BBMT800 Press Fit |
| ◎ Cassette - Sprocket | Shimano Deore CS-M6100 10-51T 12s |
| ↗ Chaîne - Chain | Shimano Deore 12s (CN-M6100) |
| ↗ Freins - Brakes | Shimano XT 2 pistons |
| ◎ Disques - Rotors | Shimano MT800 180mm/160mm |
| ↗ Manettes - Shiftlevers | Shimano XT 12s |
| ⌚ Jeu de direction - Headset | "FSA Integrated 1.5ZS IS-2 /42/ACB hidden set |
| ↖ Cintre - Handlebar | Race Face Turbine, Width: 760mm, Rise: 15mm, Ø: 31.8mm bar bore |
| ↗ Poignées - Grips | Lapierre "Fit" grips, S/M: small size, L/XL: large size |
| ➡ Potence - Stem | Lapierre alloy, 7°, L: 60mm (S/M) / 70mm (L/XL) |
| ↖ Tige de selle - Seatpost | JD dropper "Rad travel adjust", Ø: 31.6mm, travel: 125mm (all sizes) |
| ➡ Selle - Saddle | Fizik Taiga black |
| ◎ Roues complètes - Wheelset | DT Swiss XM 1700 Spline 29"*25c Boost Microspline |
| ○ Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 Rear/ Ardent Race 3C Maxxspeed EXO TR 29x2.35 front |
| ↗ Pédales - Pedals | NW-91K |
| & Accessoires - Accessories | Valves + Thru axle Bottle opener lever |



Illustrations non contractuelles. Non-binding illustrations.

XRM 6.9

Ref. → LRENA

~~ CROSS-COUNTRY | MARATHON

| | |
|--|--|
| ↗ Cadre - Frame | NEW XRM full Carbon 110mm travel (29"), pressfit, boost, metric, thru axle |
| ↖ Fourche - Fork | Rock Shox SID SELECT CHARGER RL REMOTE 29" BOOST™ - 120MM (29") 44mm rake |
| ↗ Amortisseur - Shock | Rock Shox SID LUXE Select + REMOTE OUT PULL 210X50 (Std/Std) |
| ↘ Dérailleur arrière - Rear derailleur | SRAM GX Lunar Eagle, 12s |
| ↗ Pédalier - Crankset | Sram GX Lunar EAGLE BOOST148 DUB BLACK 32T 170mm (S) /175mm (M/L/XL) |
| ↗ Boîtier pédalier - Bottom bracket | Sram DUB Pressfit MTB 92 |
| ◎ Cassette - Sprocket | SRAM PG1230 Eagle 11-50 12s |
| ↗ Chaîne - Chain | SRAM NX Eagle 12s |
| ↗ Freins - Brakes | Sram LEVEL T 2 pistons |
| ◎ Disques - Rotors | Centerline Rounded 180mm/160mm front/rear (29") |
| ↗ Manettes - Shiftlevers | SRAM GX Lunar Eagle 12s |
| ⌚ Jeu de direction - Headset | FSA Integrated 1.5ZS IS-2 /42/ACB hidden set |
| ~~ Cintre - Handlebar | Lapierre alloy 6061DB, Width: 760mm, Rise: 15mm, Ø: 31.8mm bar bore |
| ↗ Poignées - Grips | Lapierre "Fit" grips, S/M: small size, L/XL: large size |
| ↗ Potence - Stem | Lapierre alloy, 7°, L: 60mm (S/M) / 70mm (L/XL) |
| ↖ Tige de selle - Seatpost | Lapierre dropper by JD, travel: 100mm (all sizes) |
| ↖ Selle - Saddle | Fizik Taiga black |
| ● Moyeu avant - Front hub | Lapierre by Fastace DF813 boost 15x110, 32H |
| ● Moyeu arrière - Rear hub | Lapierre by Fastace DR813 4 sealed bearings, boost 12x148, 32H |
| ↗ Jantes - Rims | Mavic XC 425 29" 32T |
| ○ Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 Rear/ Ardent Race EXO 29x2.35 front |
| ↘ Pédales - Pedals | NW-91K |
| & Accessoires - Accessories | Tubeless flap + Valves + Thru axle Bottle opener lever |

 Carbon Ultimate

 1x12 Speed


 29"

XR



Géométrie

GEOMETRY

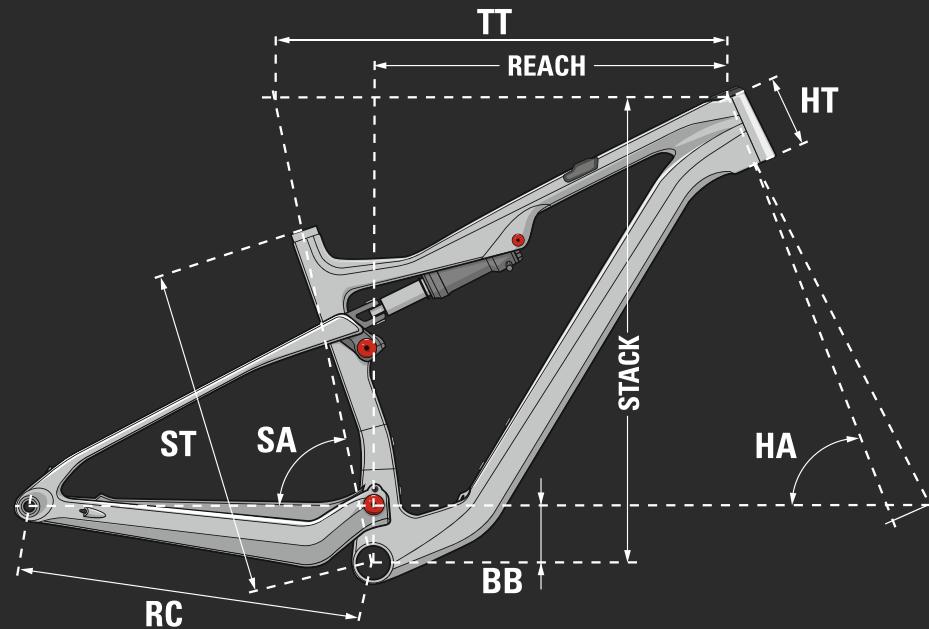

| SIZE | S | M | L | XL |
|-------------------|------|------|------|------|
| ST (mm) | 390 | 430 | 470 | 510 |
| TT (mm) | 575 | 602 | 624 | 651 |
| HA (°) | 66,5 | 66,5 | 66,5 | 66,5 |
| SA (°) | 75 | 75 | 75 | 75 |
| RC (mm) | 435 | 435 | 435 | 435 |
| HT (mm) | 85 | 90 | 100 | 110 |
| BB (mm) | -45 | -45 | -45 | -45 |
| Frk Travel | 110 | 110 | 110 | 110 |
| Frk Length | 517 | 517 | 517 | 517 |
| Frk Offset | 44 | 44 | 44 | 44 |
| Stack | 580 | 584 | 593 | 602 |
| Reach | 420 | 445 | 465 | 490 |
| WB | 1133 | 1161 | 1184 | 1213 |

| | | | | |
|-------------|-----------|-----------|-----------|----------|
| User | S 155-170 | M 170-180 | L 178-188 | XL >186 |
| Ref. | LR_N_390 | LR_N_430 | LR_N_470 | LR_N_510 |



Illustrations non-contractuelles. Non-binding illustrations.

XR 9.9

~~ CROSS-COUNTRY

Ref. ➔ LRCNA

| | |
|--|--|
| ↗ Cadre - Frame | NEW XR full Carbon 100mm travel (29") Team layup, pressfit, boost, metric, thru axle |
| ↳ Fourche - Fork | Rock Shox SID Ultimate Charger Race Day Remote - 100mm (29") 44mm rake |
| ↗ Amortisseur - Shock | Rock Shox SID LUXE ULTIMATE REMOTE OUT PULL 210X50 (Std/Std) |
| ↳ Dérailleur arrière - Rear derailleur | SRAM XX1 Eagle, 12s |
| ↳ Pédalier - Crankset | Sram X1 Carbon EAGLE BOOST148 DUB BLACK 34T 170mm (S) / 175mm (M/L/XL) |
| ↗ Boîtier pédalier - Bottom bracket | Sram DUB Pressfit MTB 92 |
| ◎ Cassette - Sprocket | SRAM XG1275 10-52T 12s |
| ↗ Chaîne - Chain | SRAM XO1 Eagle 12s |
| ↗ Freins - Brakes | Sram LEVEL TLM 2 pistons |
| ◎ Disques - Rotors | Centerline CLX Rounded 180mm/160mm front/rear (29") |
| ↗ Manettes - Shiftlevers | SRAM XO1 Lunar Eagle 12s |
| ⌚ Jeu de direction - Headset | FSA Integrated 1.5ZS IS-2/42/ACB hidden set |
| ↖ Cintre - Handlebar | Progress Carbon Combo cockpit UD (2° stem), Width: 760mm, Ø: 31.8mm |
| ⌚ Poignées - Grips | Lapierre "Fit" grips, S/M: small size, L/XL: large size |
| ➡ Potence - Stem | Integrated to HB, 50mm (S) / 60mm(M/L) / 70mm(XL) |
| ↖ Tige de selle - Seatpost | Lapierre carbon light, Ø: 31.6mm, L: 400mm |
| ↖ Selle - Saddle | Fizik Taiga black |
| ◎ Roues complètes - Wheelset | NEW Lapierre carbon XC SL 29" Boost XD driver, 6-bolt |
| ○ Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 120 TPI 3C MaxTerra |
| ↳ Pédales - Pedals | NW-91K |
| & Accessoires - Accessories | Valves + Thru axle Bottle opener lever |



Illustrations non contractuelles. Non-binding illustrations.

XR 7.9

~~ CROSS-COUNTRY

Ref. → LRBNA

| | |
|--|---|
| ↗ Cadre - Frame | NEW XR full Carbon 100mm travel (29"), pressfit, boost, metric, thru axle |
| ↖ Fourche - Fork | Fox 32 SC Perf-Series Float 3 Pos /remote boost 100mm (29") 44mm rake |
| ↗ Amortisseur - Shock | FOX FLOAT DPS, Perf-Series Remote up, Evol LV, 210x50 (Std/Std) |
| ↘ Dérailleur arrière - Rear derailleur | SRAM XO1 Eagle, 12s |
| ↗ Pédalier - Crankset | Sram GX Lunar EAGLE BOOST148 DUB BLACK 34T 170mm (S) /175mm (M/L/XL) |
| ↗ Boîtier pédalier - Bottom bracket | Sram DUB Pressfit MTB 92 |
| ◎ Cassette - Sprocket | SRAM XG1275 10-52T 12s |
| ↖ Chaîne - Chain | SRAM NX Eagle 12s |
| ↗ Freins - Brakes | Sram LEVEL TL 2 pistons |
| ◎ Disques - Rotors | Centerline Rounded 180mm/160mm front/rear (29") |
| ↗ Manettes - Shiftevers | SRAM GX Lunar Eagle 12s |
| ⌚ Jeu de direction - Headset | FSA Integrated 1.5ZS IS-2/42/ACB hidden set |
| ↖ Cintre - Handlebar | Progress Carbon UD Flat, Width: 740mm, Ø: 31.8mm |
| ↗ Poignées - Grips | Lapierre "Fit" grips, S/M: small size, L/XL: large size |
| → Potence - Stem | Lapierre alloy, 7°, L: 60mm (S/M) / 70mm (L/XL) |
| ↖ Tige de selle - Seatpost | Lapierre alloy forged, Ø: 31,6mm, L: 400mm |
| — Selle - Saddle | Fizik Taiga black |
| ◎ Roues complètes - Wheelset | DT Swiss X1900 Spline - 29**25c boost 6 bolts |
| ○ Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 |
| ↗ Pédales - Pedals | NW-91K |
| & Accessoires - Accessories | Valves + Thru axle Bottle opener lever |

 Carbon Ultimate

 1x12 Speed

 29"



Illustrations non-contractuelles. Non-binding illustrations.

XR 5.9

~~ CROSS-COUNTRY

Ref. ➔ LRANA

| | |
|--|---|
| ↗ Cadre - Frame | NEW XR full Carbon 100mm travel (29"), pressfit, boost, metric, thru axle |
| ↳ Fourche - Fork | Fox Rythm 32 Float 3 Pos /remote boost 100mm (29") 44mm rake |
| ↗ Amortisseur - Shock | FOX FLOAT DPS, Perf-Series Remote up, Evol LV, 210x50 (Std/Std) |
| ↳ Dérailleur arrière - Rear derailleur | SRAM GX Lunar Eagle, 12s |
| ↳ Pédalier - Crankset | Sram SX Eagle boost 148 Dub 12s 32T 170mm (S) / 175mm (M/L/XL) |
| ↳ Boîtier pédalier - Bottom bracket | Sram DUB Pressfit MTB 92 |
| ◎ Cassette - Sprocket | SRAM PG1210 11-50T 12s |
| ↗ Chaîne - Chain | SRAM SX Eagle 12s |
| ↗ Freins - Brakes | Sram LEVEL T 2 pistons |
| ◎ Disques - Rotors | Centerline Rounded 180mm/160mm front/rear (29") |
| ↗ Manettes - Shiftlevers | SRAM SX Eagle 12s |
| ⌚ Jeu de direction - Headset | FSA Integrated 1.5ZS IS-2 /42/ACB hidden set |
| ↖ Cintre - Handlebar | Lapierre alloy 6061 Top flat, Width: 720mm, Ø: 31.8mm |
| ⌚ Poignées - Grips | Lapierre "Fit" grips, S/M: small size, L/XL: large size |
| ➡ Potence - Stem | Lapierre alloy, 7°, L: 60mm (S/M) / 70mm (L/XL) |
| ↖ Tige de selle - Seatpost | Lapierre alloy forged, Ø: 31,6mm, L: 400mm |
| ↖ Selle - Saddle | Fizik Taiga black |
| ● Moyeu avant - Front hub | Lapierre by Fastace DF813 boost 15x110, 32H |
| ● Moyeu arrière - Rear hub | Lapierre by Fastace DR813 4 sealed bearings, boost 12x148, 32H |
| ↗ Jantes - Rims | Mavic XC 425 29" 32T |
| ○ Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 |
| ↳ Pédales - Pedals | NW-91K |
| & Accessoires - Accessories | Tubeless flap + Valves + Thru axle Bottle opener lever |




Prorace CF



Géométrie

GEOMETRY

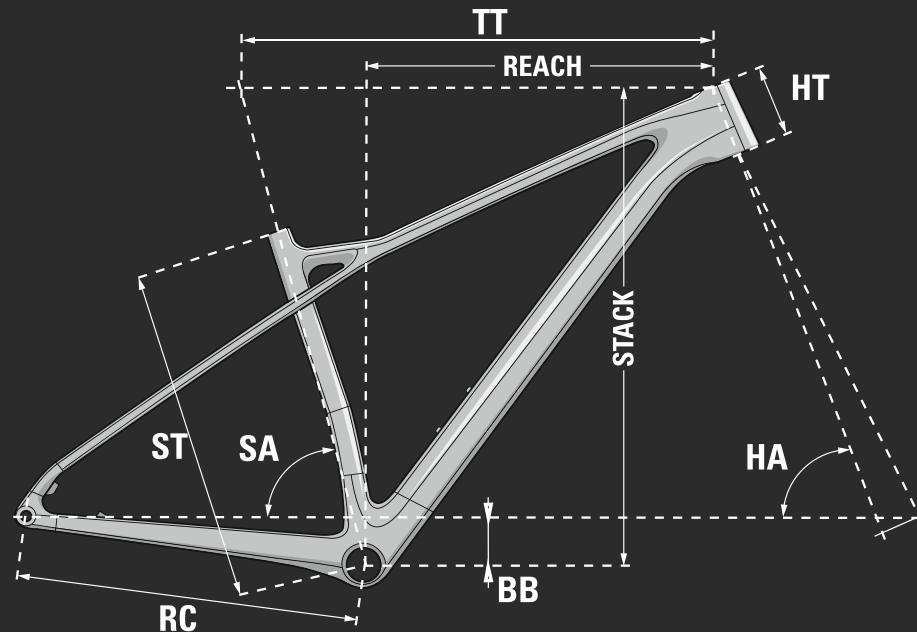

| SIZE | S | M | L | XL |
|-------------------|------|------|------|------|
| ST (mm) | 390 | 430 | 470 | 510 |
| TT (mm) | 581 | 606 | 629 | 657 |
| HA (°) | 68 | 68 | 68 | 68 |
| SA (°) | 74 | 74 | 74 | 74 |
| RC (mm) | 420 | 420 | 420 | 420 |
| HT (mm) | 85 | 90 | 100 | 110 |
| BB (mm) | -67 | -62 | -62 | -62 |
| Frk Travel | 100 | 100 | 100 | 100 |
| Frk Length | 505 | 505 | 505 | 505 |
| Frk Offset | 44 | 44 | 44 | 44 |
| Stack | 598 | 597 | 606 | 616 |
| Reach | 410 | 435 | 455 | 480 |
| WB | 1086 | 1114 | 1138 | 1167 |

| | | | | |
|-------------|-----------|-----------|-----------|----------|
| User | S 150-170 | M 168-178 | L 176-186 | XL >184 |
| Ref. | LP_N_390 | LP_N_430 | LP_N_470 | LP_N_510 |



Illustrations non-contractuelles. Non-binding illustrations.

Prorace CF 9.9

~~ CROSS-COUNTRY

Ref. ➔ LPLNA

| | |
|--------------------------------------|--|
| Cadre - Frame | New Prorace 29" carbon, pressfit, boost, thru axle 12x148mm |
| Fourche - Fork | RockShox SID SL Ultimate Charger Race Day remote 100mm boost / Gloss black |
| Dérailleur arrière - Rear derailleur | SRAM X01 Eagle AXS, 12s |
| Pédalier - Crankset | Sram X1 carbon Eagle DUB 34T Chainline 55mm Lunar 170mm (S) / 175mm (M, L, XL) |
| Boîtier pédalier - Bottom bracket | SRAM DUB Press Fit 92 |
| Cassette - Sprocket | SRAM XG1275 Eagle 10-52T 12s |
| Chaîne - Chain | SRAM X01 Eagle 12s |
| Freins - Brakes | SRAM Level TLM black with Stealth-a-majig |
| Disques - Rotors | SRAM Centerline 180mm/160mm Center Lock |
| Manettes - Shiftlevers | SRAM GX AXS EAGLE |
| Jeu de direction - Headset | FSA Orbit C-40-ACB NO.42/ACB-A |
| Cintre - Handlebar | FSA SLK carbon flat, Width: 740mm, Ø: 31.8mm |
| Poignées - Grips | Lapierre foam grips small (S), large (M, L, XL) |
| Potence - Stem | Lapierre 7050 alloy 3D forged, 7°, Ø: 31.8mm, L: 60mm (S, M), 70mm (L, XL) |
| Tige de selle - Seatpost | Lapierre carbon, Ø: 27.2mm, L: 400mm |
| Selle - Saddle | Fizik Taiga black |
| Roues complètes - Wheelset | Lapierre carbon XC 29" Boost XD driver, 6-bolt |
| Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 120 TPI 3C MaxTerra |
| Pédales - Pedals | NW 91K Steel cage |



Illustrations non contractuelles. Non-binding illustrations.

Prorace CF 8.9

~~ CROSS-COUNTRY

Ref. → LPJNA

| | |
|--|---|
| ✓ Cadre - Frame | New Prorace 29" carbon, pressfit, boost, thru axle 12x148mm |
| ↳ Fourche - Fork | Fox 32 STEP CAST Factory 15mm 29" 100mm boost + 2-position remote - Stealth decal |
| ↗ Dérailleur arrière - Rear derailleur | Shimano XT RD-M8100, 12s |
| ↗ Pédalier - Crankset | Shimano Deore XT (8120) 32T Chainline 55mm 170mm (S) / 175mm (M, L, XL) |
| ➡ Boîtier pédalier - Bottom bracket | Shimano Press Fit MTB 92 |
| ● Cassette - Sprocket | Shimano Deore XT CS-M8100 10-51T 12s |
| ↷ Chaîne - Chain | Shimano Deore 12s (CN-M6100) |
| ↗ Freins - Brakes | Shimano Deore XT B-LM 8100 with J-kit |
| ● Disques - Rotors | Shimano RT-MT800 180mm/160mm Center Lock |
| ↙ Manettes - Shiftlevers | Shimano Deore XT 12s |
| ⌚ Jeu de direction - Headset | FSA Orbit C-40-ACB NO.42/ACB-A |
| ↷ Cintre - Handlebar | RaceFace Turbine alloy, 0,5" Rise, Width: 760mm, Ø:31,8mm |
| ↳ Poignées - Grips | Lapierre foam grips small (S), large (M, L, XL) |
| ➡ Potence - Stem | Lapierre 7050 alloy 3D forged, 7°, Ø: 31.8mm, L: 60mm (S, M), 70mm (L, XL) |
| ↖ Tige de selle - Seatpost | Lapierre alloy forged, Ø: 27.2mm, L: 400mm |
| — Selle - Saddle | Fizik Taiga black |
| ● Roues complètes - Wheelset | Lapierre carbon XC 29" Boost Microspline, 6-bolt |
| ○ Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 120 TPI 3C MaxTerra |
| ↘ Pédales - Pedals | NW 91K Steel cage |

 Carbon Ultimate

 1x12 Speed

 29"



Illustrations non-contractuelles. Non-binding illustrations.

Prorace CF 7.9

~~ CROSS-COUNTRY

Ref. → LPINA

| | |
|--|---|
| ✓ Cadre - Frame | New Prorace 29" carbon, pressfit, boost, thru axle 12x148mm |
| ↳ Fourche - Fork | Fox 32 Float SC PERF 15mm 100mm boost + remote |
| ↳ Dérailleur arrière - Rear derailleur | SRAM X01 Eagle, 12s |
| ↳ Pédalier - Crankset | SRAM GX Eagle DUB 32T Chainline 55mm 170mm (S) / 175mm (M, L, XL) |
| ↳ Boîtier pédalier - Bottom bracket | SRAM DUB Press Fit 92 |
| ↳ Cassette - Sprocket | SRAM PG1230 Eagle 11-50T 12s |
| ↳ Chaîne - Chain | SRAM GX Eagle 12s |
| ↳ Freins - Brakes | SRAM Level TL black with Stealth-a-majig |
| ↳ Disques - Rotors | SRAM Centerline 180mm/160mm 6-bolt |
| ↳ Manettes - Shiftlevers | SRAM GX Eagle 12s |
| ↳ Jeu de direction - Headset | FSA Orbit C-40-ACB NO.42/ACB-A |
| ↳ Cintre - Handlebar | Lapierre alloy 6061 Top flat, Width: 740mm, Ø: 31.8mm |
| ↳ Poignées - Grips | Lapierre foam grips small (S), large (M, L, XL) |
| ↳ Potence - Stem | Lapierre 7050 alloy, 7°, Ø: 31.8mm, L: 60mm (S, M), 70mm (L, XL) |
| ↳ Tige de selle - Seatpost | Lapierre alloy forged, Ø: 27.2mm, L: 400mm |
| ↳ Selle - Saddle | Fizik Taiga black |
| ↳ Roues complètes - Wheelset | DT Swiss X1900 Spline boost 6-bolt |
| ↳ Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 |
| ↳ Pédales - Pedals | NW 91K Steel cage |

 Carbon Ultimate

 1x12 Speed

 29"



Illustrations non contractuelles. Non-binding illustrations.

Prorace CF 6.9

~~ CROSS-COUNTRY

Ref. → LPHNA

| | | |
|--|--------------------------------------|--|
| | Cadre - Frame | New Prorace 29" carbon, pressfit, boost, thru axle 12x148mm |
| | Fourche - Fork | RockShox SID SL Select Charger RemoteLockout Debonair 15mm 100mm Gloss black |
| | Dérailleur arrière - Rear derailleur | SRAM NX Eagle, 12s |
| | Pédalier - Crankset | SRAM NX Eagle DUB 32T Chainline 55mm 170mm (S) / 175mm (M, L, XL) |
| | Boîtier pédalier - Bottom bracket | SRAM DUB Press Fit 92 |
| | Cassette - Sprocket | SRAM PG1210 Eagle 11-50T 12s |
| | Chaîne - Chain | SRAM SX Eagle 12s |
| | Freins - Brakes | SRAM Level T black with Stealth-a-majig |
| | Disques - Rotors | SRAM G2 CleanSweep 180mm/160mm 6-bolt |
| | Manettes - Shifters | SRAM NX Eagle 12s |
| | Jeu de direction - Headset | FSA Orbit C-40-ACB NO.42/ACB-A |
| | Cintre - Handlebar | Lapierre alloy 6061 Top flat, Width: 740mm, Ø: 31.8mm |
| | Poignées - Grips | Lapierre foam grips small (S), large (M, L, XL) |
| | Potence - Stem | Lapierre 7050 alloy, 7°, Ø: 31.8mm, L: 60mm (S, M), 70mm (L, XL) |
| | Tige de selle - Seatpost | Lapierre alloy forged, Ø: 27.2mm, L: 400mm |
| | Selle - Saddle | Fizik Taiga black |
| | Moyeu avant - Front hub | Fastace DF813 6-bolt |
| | Moyeu arrière - Rear hub | Fastace DR813 6-bolt |
| | Jantes - Rims | Rodi Tryp 25 tubeless ready, 25-622 |
| | Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 |
| | Pédales - Pedals | NW 91K Steel cage |

Carbon Ultimate

1x12 Speed

29"



Illustrations non-contractuelles. Non-binding illustrations.

Prorace CF 5.9

~~ CROSS-COUNTRY

Ref. → LPGNA

| | | |
|--|--------------------------------------|---|
| | Cadre - Frame | New Prorace 29" carbon, pressfit, boost, thru axle 12x148mm |
| | Fourche - Fork | SR Suntour Raidon remote QR15mm Air 100mm boost |
| | Dérailleur arrière - Rear derailleur | SRAM SX Eagle, 12s |
| | Pédalier - Crankset | SRAM SX Eagle DUB 32T Chainline 55mm 170mm (S) / 175mm (M, L, XL) |
| | Boîtier pédalier - Bottom bracket | SRAM DUB Press Fit 92 |
| | Cassette - Sprocket | SRAM PG1210 Eagle 11-50T 12s |
| | Chaîne - Chain | SRAM SX Eagle 12s |
| | Freins - Brakes | SRAM Level black with Stealth-a-majig |
| | Disques - Rotors | SRAM G2 CleanSweep 180mm/160mm 6-bolt |
| | Manettes - Shiftlevers | SRAM SX Eagle 12s |
| | Jeu de direction - Headset | FSA Orbit C-40-ACB NO.42/ACB-A |
| | Cintre - Handlebar | Lapierre alloy 6061 Top flat, Width: 740mm, Ø: 31.8mm |
| | Poignées - Grips | Lapierre foam grips small (S), large (M, L, XL) |
| | Potence - Stem | Lapierre 7050 alloy, 7°, Ø: 31.8mm, L: 60mm (S, M), 70mm (L, XL) |
| | Tige de selle - Seatpost | Lapierre alloy forged, Ø: 27.2mm, L: 400mm |
| | Selle - Saddle | Lapierre by Velo |
| | Moyeu avant - Front hub | Fastace DF813 6-bolt |
| | Moyeu arrière - Rear hub | Fastace DR813 6-bolt |
| | Jantes - Rims | Rodi Tryp 25 tubeless ready, 25-622 |
| | Pneus - Tires | Maxxis Rekon Race EXO TR 29x2.35 |
| | Pédales - Pedals | NW 91K Steel cage |




Prorace



Géométrie

GEOMETRY

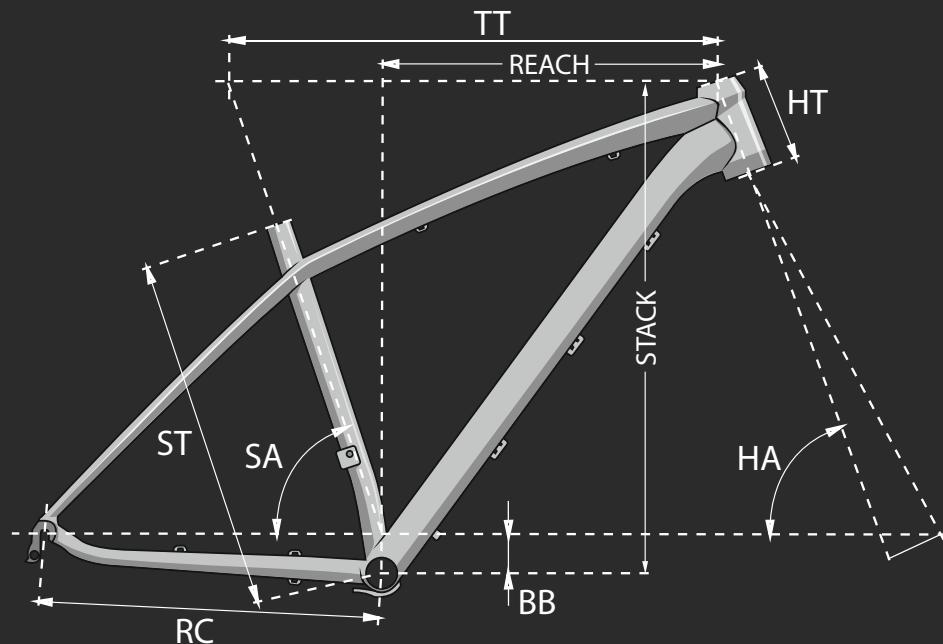

| SIZE | XS | S | M | L | XL |
|----------------|----------|----------|----------|----------|----------|
| ST (mm) | 350 | 400 | 440 | 480 | 530 |
| TT (mm) | 550 | 575 | 600 | 625 | 650 |
| HA (°) | 69 | 69.5 | 69.5 | 69.5 | 69.5 |
| SA (°) | 73 | 73 | 73 | 73 | 73 |
| RC (mm) | 428 | 428 | 428 | 428 | 428 |
| HT (mm) | 90 | 90 | 90 | 105 | 120 |
| BB (mm) | -65 | -65 | -60 | -60 | -60 |
| Reach | 371 | 390 | 416 | 437 | 458 |
| Stack | 584 | 605 | 600 | 614 | 628 |
| User | 150-163 | 160-170 | 168-178 | 176-186 | XL >184 |
| Ref. | E14_3500 | E14_4000 | E14_4400 | E14_4800 | E14_5300 |



Illustrations non-contractuelles. Non-binding illustrations.

Prorace 4.9

~~ CROSS-COUNTRY

Ref. ➔

E142

| | |
|--|--|
| ✓ Cadre - Frame | Prorace 29" Supreme 5 alloy Disc, boost, pressfit, thru axle 12x148mm, internal brake RR |
| ▶ Fourche - Fork | RockShox Judy Gold RL 15mm Solo Air 100mm boost + Oneloc |
| ↗ Dérailleur arrière - Rear derailleur | SRAM GX Lunar Eagle, 12s |
| ↗ Pédalier - Crankset | SRAM SX Eagle DUB 32T Chainline 55mm 170mm (S) / 175mm (M, L, XL) |
| ↗ Boîtier pédalier - Bottom bracket | SRAM DUB Press Fit 92 |
| ◎ Cassette - Sprocket | SRAM PG1210 Eagle 11-50T 12s |
| ↷ Chaîne - Chain | SRAM SX Eagle 12s |
| ↗ Freins - Brakes | Shimano MT401 with J-kit |
| ◎ Disques - Rotors | Shimano SMRT30 180mm/160mm Center Lock |
| ↙ Manettes - Shiftlevers | SRAM SX Eagle 12s |
| ⌚ Jeu de direction - Headset | FSA Orbit 1.5Z SC NO.57SC |
| ↖ Cintre - Handlebar | Lapierre alloy 6061 Top flat, Width: 720mm, Ø: 31.8mm |
| ⌚ Poignées - Grips | Lapierre by Hermans DD30B |
| ➡ Potence - Stem | Lapierre 7050 alloy, 7°, Ø: 31.8mm, L: 60mm (S, M), 70mm (L, XL) |
| ↖ Tige de selle - Seatpost | Lapierre alloy, Ø: 27.2mm, L: 400mm |
| → Selle - Saddle | Selle Royal Vivo |
| ● Moyeu avant - Front hub | Shimano MT400 |
| ● Moyeu arrière - Rear hub | Shimano MT410 Microspline |
| ▷ Jantes - Rims | Rodi Excalibur XC2 19-622, 32H, tapered spokes |
| ○ Pneus - Tires | Maxxis, front: 29x2.25 Ardent / rear: 29x2.20 Ikon folding skinwall, 60TPI |
| ↘ Pédales - Pedals | NW 91K Steel cage |



Alloy Suprême 5



1x12 Speed



29"



Illustrations non contractuelles. Non-binding illustrations.

Prorace 3.9

↗ CROSS-COUNTRY

Ref. → E140

| | |
|--|---|
| ↗ Cadre - Frame | Prorace 29" Supreme 5 alloy Disc, pressfit, thru axle 12x148mm, internal brake RR |
| ↗ Fourche - Fork | RST FIRST AIR TRL Boost 100mm 29" OU, OR Suntour Raidon Remote QR15mm Air 100mm Boost |
| ↗ Dérailleur arrière - Rear derailleur | Shimano Deore RD-M6100, 12s |
| ↗ Pédalier - Crankset | Shimano Deore (5101) 32T 170mm (S) / 175mm (M, L, XL) |
| ↗ Boîtier pédalier - Bottom bracket | Shimano Press Fit MTB 92 |
| ↗ Cassette - Sprocket | Shimano Deore CS-M6100 10-51T 12s |
| ↗ Chaîne - Chain | Shimano Deore 12s (CN-M6100) |
| ↗ Freins - Brakes | Shimano MT200 with J-kit |
| ↗ Disques - Rotors | Shimano SMRT30 180mm/160mm Center Lock |
| ↗ Manettes - Shiftlevers | Shimano Deore 12s |
| ↗ Jeu de direction - Headset | FSA Orbit 1.5Z SC NO.57SC |
| ↗ Cintre - Handlebar | Lapierre alloy 6061 Top flat, Width: 720mm, Ø: 31.8mm |
| ↗ Poignées - Grips | Lapierre by Hermans DD30B |
| ↗ Potence - Stem | Lapierre 7050 alloy, 7°, Ø: 31.8mm, L: 60mm (S, M), 70mm (L, XL) |
| ↗ Tige de selle - Seatpost | Lapierre alloy, Ø: 27.2mm, L: 400mm |
| ↗ Selle - Saddle | Selle Royal Vivo |
| ↗ Moyeu avant - Front hub | Shimano MT400 |
| ↗ Moyeu arrière - Rear hub | Shimano MT410 Microspine |
| ↗ Jantes - Rims | Rodi Excalibur XC2 19-622, 32H, tapered spokes |
| ↗ Pneus - Tires | Schwalbe, front: Tough Tom K-Guard 29x2.25 / rear: Rapid Rob K-Guard 29x2.25 |
| ↗ Pédales - Pedals | NW 91K Steel cage |

Alloy Suprême 5

1x12 Speed

29"

Edge



Géométrie

GEOMETRY



| SIZE | XS | S | M | S | M | L | XL |
|----------------|------------|-----------|-----------|-----------|-----------|-----------|----------|
| ST (mm) | 360 | 400 | 440 | 400 | 440 | 480 | 520 |
| TT (mm) | 545 | 570 | 590 | 575 | 595 | 615 | 635 |
| HA (°) | 68 | 68 | 68 | 68 | 68 | 68 | 68 |
| SA (°) | 73.5 | 73.5 | 73.5 | 73.5 | 73.5 | 73.5 | 73.5 |
| RC (mm) | 430 | 430 | 430 | 450 | 450 | 450 | 450 |
| HT (mm) | 105 | 115 | 125 | 105 | 115 | 125 | 135 |
| BB (mm) | -45 | -45 | -45 | -60 | -60 | -60 | -60 |
| Reach | 370 | 393 | 410 | 391 | 408 | 425 | 443 |
| Stack | 588 | 597 | 606 | 620 | 629 | 639 | 648 |
| User | XS 145-155 | S 150-170 | M 168-178 | S 150-170 | M 168-178 | L 176-186 | XL > 184 |
| Ref. | F1xx3600 | F1xx3800 | F1xx4400 | F1xx4000 | F1xx4400 | F1xx4800 | F1xx5200 |

27.5"

29"

| SIZE | XS | S | M |
|----------------|------------|-----------|-----------|
| ST (mm) | 360 | 400 | 440 |
| TT (mm) | 545 | 570 | 590 |
| HA (°) | 68 | 68 | 68 |
| SA (°) | 73.5 | 73.5 | 73.5 |
| RC (mm) | 430 | 430 | 430 |
| HT (mm) | 105 | 115 | 125 |
| BB (mm) | -45 | -45 | -45 |
| Reach | 370 | 393 | 410 |
| Stack | 588 | 597 | 606 |
| User | XS 135-155 | S 150-165 | M 160-175 |
| Ref. | F1xx3600 | F1xx4000 | F1xx4400 |

WOMEN
SERIES

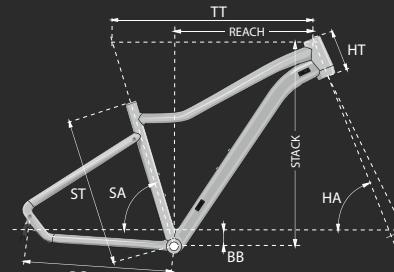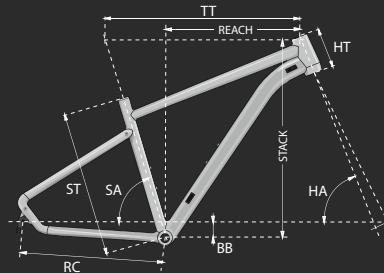



Illustrations non-contractuelles. Non-binding illustrations.

Edge 9.9

SPORT

Ref. →

F131

| | |
|--|--|
| ↗ Cadre - Frame | Edge 29" Supreme 5 alloy Disc, internal cable routing |
| ↳ Fourche - Fork | ROCKSHOX JUDY SILVER TK REMOTE 29" QR COIL100mm travel |
| ↗ Dérailleur arrière - Rear derailleur | Shimano Deore RD-M6100 Shadow plus SGS, 12s |
| ↗ Pédalier - Crankset | Shimano Deore FC-M5100-1 2-piece 30T 170mm (S) / 175mm (M/L/XL) |
| ↗ Boîtier pédalier - Bottom bracket | Shimano external cups |
| ◎ Cassette - Sprocket | Shimano Deore CS-M6100-12 12s Hyperglide+ |
| ↗ Chaîne - Chain | KMC X-12 12s |
| ↗ Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| ◎ Disques - Rotors | Shimano SMRT30 180mm/160mm Center Lock |
| ↗ Manettes - Shiftlevers | Shimano Deore SL-M6100-R 12s |
| ⌚ Jeu de direction - Headset | FSA NO.10 semi-integrated |
| ↖ Cintre - Handlebar | XLC alloy 6061 Top flat, Width: 720mm, Ø: 31.8mm |
| ↙ Poignées - Grips | Herrmans Lock-on DD30B 130mm |
| ➡ Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| ↖ Tige de selle - Seatpost | XLC alloy, Ø: 31.6mm, L: 400mm |
| → Selle - Saddle | XLC by DDK |
| ● Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| ● Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| △ Jantes - Rims | Lapierre Disc, 32H, 29", 21-622 |
| ○ Pneus - Tires | Schwalbe, front: Tough Tom 29x2.25 622-57 / rear: Rapid Rob 29x2.25 622-57 |
| ↘ Pédales - Pedals | FPD NW-91K Steel cage |



Alloy Suprême 5



1x12 Speed



29"



Illustrations non contractuelles. Non-binding illustrations.

Edge 7.9

SPORT

Ref. → F130

| | | |
|--|--------------------------------------|--|
| | Cadre - Frame | Edge 29" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | ROCKSHOX JUDY SILVER TK REMOTE 29" QR COIL100mm travel |
| | Dérailleur arrière - Rear derailleur | Shimano Deore RD-M5100 Shadow plus SGS, 11s |
| | Pédalier - Crankset | Shimano Deore FC-M5100-1 2-piece 32T 170mm (S) / 175mm (M/L/XL) |
| | Boîtier pédalier - Bottom bracket | Shimano external cups |
| | Cassette - Sprocket | Shimano Deore CS-M5100-11 11-51T 11s |
| | Chaîne - Chain | KMC X11 1/2"x11/128" 11s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT30 180mm/160mm Center Lock |
| | Manettes - Shiftlevers | Shimano Deore SL-M5100-R Rapidfire 11s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Cintre - Handlebar | XLC alloy 6061 Top flat, Width: 720mm, Ø: 31.8mm |
| | Poignées - Grips | Herrmans Lock-on DD30B 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 31.6mm, L: 400mm |
| | Selle - Saddle | XLC by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 29", 21-622 |
| | Pneus - Tires | Schwalbe, front: Tough Tom 29x2.25 622-57 / rear: Rapid Rob 29x2.25 622-57 |
| | Pédales - Pedals | FPD NW-91K Steel cage |

Alloy Suprême 5

1x11 Speed

29"



Illustrations non-contractuelles. Non-binding illustrations.

Edge 5.9

SPORT

Ref. →

F127

| | | |
|--|--------------------------------------|---|
| | Cadre - Frame | Edge 29" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | RST BLAZE RL-DS RL 29" 100mm travel
 OU, OR SR Suntour XCM-RL-DS 29" 100mm Travel |
| | Dérailleur avant - Front derailleur | Shimano Altus FD-M2020 (Side swing) |
| | Dérailleur arrière - Rear derailleur | Shimano Altus Shadow RD-M2000, 9s |
| | Pédalier - Crankset | Shimano FC-MT101 36-22T 175mm (M/L/XL) |
| | Boîtier pédalier - Bottom bracket | Square 122mm |
| | Cassette - Sprocket | Sunrace CSM90 11-36T 9s |
| | Chaîne - Chain | KMC X9 1/2"x11/128" 9s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT10S 180mm front/ 160mm rear Center Lock |
| | Manettes - Shiftlevers | Shimano Altus STEF505 9s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Cintre - Handlebar | XLC alloy 6061 Top flat, Width: 720mm, Ø: 31.8mm |
| | Poignées - Grips | Herrmans Lock-on DD30B 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 31.6mm, L: 400mm |
| | Selle - Saddle | XLC by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 29", 21-622 |
| | Pneus - Tires | Schwalbe, front: Tough Tom 29x2.25 622-57 / rear: Rapid Rob 29x2.25 622-57 |
| | Pédales - Pedals | Xerama SP-400 |



Alloy Suprême 5



2x9 Speed



29"



Illustrations non contractuelles. Non-binding illustrations.

Edge 5.7

SPORT

Ref. → F125

| | | |
|--|--------------------------------------|---|
| | Cadre - Frame | Edge 27.5" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | RST BLAZE RL-DS RL 27.5" 100mm travel
 OU, OR SR Suntour XCM-RL-DS 27.5" 100mm Travel |
| | Dérailleur avant - Front derailleur | Shimano Altus FD-M2020 (Side swing) |
| | Dérailleur arrière - Rear derailleur | Shimano Altus Shadow RD-M2000, 9s |
| | Pédalier - Crankset | Shimano FC-MT101 36-22T 170mm (XS/S) / 175mm (M) |
| | Boîtier pédalier - Bottom bracket | Square 120mm |
| | Cassette - Sprocket | Sunrace CSM90 11-36T 9s |
| | Chaîne - Chain | KMC X9 1/2"x11/128" 9s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT10S 160mm front/rear Center Lock |
| | Manettes - Shiftlevers | Shimano Altus STEF505 9s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Cintre - Handlebar | XLC alloy 6061, Width: 720mm, Rise: 15mm, Ø: 31.8mm |
| | Poignées - Grips | Herrmans Lock-on DD30B 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 30.9mm, L: 400mm |
| | Selle - Saddle | XLC by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 27.5", 21-584 |
| | Pneus - Tires | Schwalbe, front: Tough Tom 27.5x2.25 57-584 / rear: Rapid Rob 27.5x2.25 57-584 |
| | Pédales - Pedals | Xerama SP-400 |

Alloy Suprême 5

2x9 Speed

27.5"



Illustrations non-contractuelles. Non-binding illustrations.

Edge 5.7 W

SPORT

Ref. → F126

| | | |
|--|--------------------------------------|---|
| | Cadre - Frame | Edge Women 27.5" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | RST BLAZE RL-DS RL 27.5" 100mm travel
 OU, OR SR Suntour XCM-RL-DS 27.5" 100mm Travel |
| | Dérailleur avant - Front derailleur | Shimano Altus FD-M2020 (Side swing) |
| | Dérailleur arrière - Rear derailleur | Shimano Altus Shadow RD-M2000, 9s |
| | Pédalier - Crankset | Shimano FC-MT101 36-22T 170mm (XS/S) / 175mm (M) |
| | Boîtier pédalier - Bottom bracket | Square 122mm |
| | Cassette - Sprocket | Sunrace CSM90 11-36T 9s |
| | Chaîne - Chain | KMC X9 1/2"x11/128" 9s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT10S 160mm front/rear Center Lock |
| | Manettes - Shiftlevers | Shimano Altus STEF505 9s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Cintre - Handlebar | XLC alloy 6061, Width: 700mm, Rise: 15mm, Ø: 31.8mm |
| | Poignées - Grips | Herrmans Lock-on DD30B 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 30.9mm, L: 400mm |
| | Selle - Saddle | XLC Women by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 27.5", 21-584 |
| | Pneus - Tires | Schwalbe, front: Tough Tom 27.5x2.25 57-584 / rear: Rapid Rob 27.5x2.25 57-584 |
| | Pédales - Pedals | Xerama SP-400 |

Alloy Suprême 5

2x9 Speed

27.5"



Illustrations non contractuelles. Non-binding illustrations.

Edge 3.7 W

SPORT

Ref. → F123

| | | |
|--|--------------------------------------|---|
| | Cadre - Frame | Edge Women 27.5" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | RST BLAZE -TNL(HLO)-DS 27.5" 100mm travel
 OU, OR SR Suntour XCT30 -HLO-DS 27.5" 100mm Travel |
| | Dérailleur avant - Front derailleur | Shimano Tourney FD-TY300 |
| | Dérailleur arrière - Rear derailleur | Shimano Acera RD-M360, 8s |
| | Pédalier - Crankset | Shimano TY301 42-34-24T 170mm (XS/S) / 175mm (M) |
| | Boîtier pédalier - Bottom bracket | Square 124.5mm |
| | Cassette - Sprocket | Sunrace CSM400 12-32T 8s |
| | Chaîne - Chain | S52 1/2"x3/32" 8s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT10S 160mm front/rear Center Lock |
| | Manettes - Shiftlevers | Shimano Altus STEF505 8s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Cintre - Handlebar | XLC alloy 6061, Width: 720mm, Rise: 15mm, Ø: 31.8mm |
| | Poignées - Grips | Velo Double Density 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 30.9mm, L: 400mm |
| | Selle - Saddle | XLC Women by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 27.5", 21-584 |
| | Pneus - Tires | Mitas Ocelot 27.5x2.1 54-584 |
| | Pédales - Pedals | Xerama SP-400 |

Alloy Suprême 5

3x8 Speed

27.5"



Illustrations non-contractuelles. Non-binding illustrations.

Edge 3.9

SPORT

Ref. →

F124

| | | |
|--|--------------------------------------|---|
| | Cadre - Frame | Edge 29" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | RST BLAZE -TNL(HLO)-DSS 29" 100mm travel |
| | | OU, OR SR Suntour XCT30 -HLO-DS 29" 100mm Travel |
| | Dérailleur avant - Front derailleur | Shimano Tourney FD-TY300 |
| | Dérailleur arrière - Rear derailleur | Shimano Acera RD-M360, 8s |
| | Pédalier - Crankset | Shimano TY301 42-34-24T 175mm (M/L/XL) |
| | Boîtier pédalier - Bottom bracket | Square 124.5mm |
| | Cassette - Sprocket | Sunrace CSM400 12-32T 8s |
| | Chaîne - Chain | S52 1/2"x3/32" 8s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT10S 160mm front/rear Center Lock |
| | Manettes - Shiftlevers | Shimano Altus STEF505 8s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Cintre - Handlebar | XLC alloy 6061 Top flat, Width: 720mm, Ø: 31.8mm |
| | Poignées - Grips | Velo Double Density 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 30.9mm, L: 400mm |
| | Selle - Saddle | XLC by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 29", 21-622 |
| | Pneus - Tires | Mitas Ocelot 29x2.1 54-622 |
| | Pédales - Pedals | Xerama SP-400 |



Alloy Suprême 5



3x8 Speed



29"



Illustrations non contractuelles. Non-binding illustrations.

Edge 3.7

SPORT

Ref. → F122

| | | |
|--|--------------------------------------|---|
| | Cadre - Frame | Edge 27.5" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | RST BLAZE -TNL(HLO)-DS 27.5" 100mm travel
 OU, OR SR Suntour XCT30 -HLO-DS 27.5" 100mm Travel |
| | Dérailleur avant - Front derailleur | Shimano Tourney FD-TY300 |
| | Dérailleur arrière - Rear derailleur | Shimano Acera RD-M360, 8s |
| | Pédalier - Crankset | Shimano TY301 42-34-24T 170mm (XS/S) / 175mm (M) |
| | Boîtier pédalier - Bottom bracket | Square 124.5mm |
| | Cassette - Sprocket | Sunrace CSM400 12-32T 8s |
| | Chaîne - Chain | S52 1/2"x3/32" 8s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT10S 160mm front/rear Center Lock |
| | Manettes - Shiftlevers | Shimano Altus STEF505 8s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Cintre - Handlebar | XLC alloy 6061, Width: 720mm, Rise: 15mm, Ø: 31.8mm |
| | Poignées - Grips | Velo Double Density 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 30.9mm, L: 400mm |
| | Selle - Saddle | XLC by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 27.5", 21-584 |
| | Pneus - Tires | Mitas Ocelot 27.5x2.1 54-584 |
| | Pédales - Pedals | Xerama SP-400 |

Alloy Suprême 5

3x8 Speed

27.5"



Illustrations non-contractuelles. Non-binding illustrations.

Edge 2.9

SPORT

Ref. →

F119

| | | |
|--|--------------------------------------|--|
| | Cadre - Frame | Edge 29" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | RST GILA-T 29" 100mm travel OU, OR SR Suntour XCE28 29" 100mm Travel |
| | Dérailleur avant - Front derailleur | Shimano Tourney FD-TY300 |
| | Dérailleur arrière - Rear derailleur | Shimano Tourney RD-TY300, 7s |
| | Pédalier - Crankset | Shimano TY301 42-34-24T 175mm (M/L/XL) |
| | Boîtier pédalier - Bottom bracket | Square 124.5mm |
| | Cassette - Sprocket | Shimano HG20 12-32T 7s |
| | Chaîne - Chain | S52 1/2"x3/32" 7s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT10S 160mm front/rear Center Lock |
| | Manettes - Shifters | Shimano Altus STEF505 7s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Cintre - Handlebar | XLC alloy 6061 Top flat, Width: 720mm, Ø: 31.8mm |
| | Poignées - Grips | Velo Double Density 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 30.9mm, L: 400mm |
| | Selle - Saddle | XLC by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 29", 21-622 |
| | Pneus - Tires | Mitas Ocelot 29x2.1 54-622 |
| | Pédales - Pedals | Xerama SP-400 |

Alloy Suprême 5

3x7 Speed

29"




Illustrations non contractuelles. Non-binding illustrations.

Edge 2.7

SPORT

Ref. → F120

| | | |
|--|--------------------------------------|--|
| | Cadre - Frame | Edge 27.5" Supreme 5 alloy Disc, internal cable routing |
| | Fourche - Fork | RST GILA-T 27.5" 100mm travel OU, OR SR SunTour XCE28 27.5" 100mm Travel |
| | Dérailleur avant - Front derailleur | Shimano Tourney FD-TY300 |
| | Dérailleur arrière - Rear derailleur | Shimano Tourney RD-TY300, 7s |
| | Pédalier - Crankset | Shimano TY301 42-34-24T 170mm (XS/S) / 175mm (M) |
| | Boîtier pédalier - Bottom bracket | Square 124.5mm |
| | Cassette - Sprocket | Shimano HG20 12-32T 7s |
| | Chaîne - Chain | S52 1/2"x3/32" 7s |
| | Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| | Disques - Rotors | Shimano SMRT10S 160mm front/rear Center Lock |
| | Manettes - Shiftevers | Shimano Altus STEF505 7s |
| | Jeu de direction - Headset | FSA NO.10 semi-integrated |
| | Centre - Handlebar | XLC alloy 6061, Width: 720mm, Rise: 15mm, Ø: 31.8mm |
| | Poignées - Grips | Velo Double Density 130mm |
| | Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| | Tige de selle - Seatpost | XLC alloy, Ø: 30.9mm, L: 400mm |
| | Selle - Saddle | XLC by DDK |
| | Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| | Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| | Jantes - Rims | Lapierre Disc, 32H, 27.5", 21-584 |
| | Pneus - Tires | Mitas Ocelot 27.5x2.1 54-584 |
| | Pédales - Pedals | Xerama SP-400 |





Illustrations non-contractuelles. Non-binding illustrations.

Edge 2.7 W

SPORT

Ref. →

F121

| | |
|--|--|
| ↗ Cadre - Frame | Edge Women 27.5" Supreme 5 alloy Disc, internal cable routing |
| ↳ Fourche - Fork | RST GILA-T 27.5" 100mm travel OU, OR SR Suntour XCE28 27.5" 100mm Travel |
| ↗ Dérailleur avant - Front derailleur | Shimano Tourney FD-TY300 |
| ↘ Dérailleur arrière - Rear derailleur | Shimano Tourney RD-TY300, 7s |
| ↗ Pédalier - Crankset | Shimano TY301 42-34-24T 170mm (XS/S) / 175mm (M) |
| ↗ Boîtier pédalier - Bottom bracket | Square 124.5mm |
| ◎ Cassette - Sprocket | Shimano HG20 12-32T 7s |
| ↙ Chaîne - Chain | S52 1/2"x3/32" 7s |
| ↗ Freins - Brakes | Shimano MT200 hydraulic brakes Disc |
| ◎ Disques - Rotors | Shimano SMRT10S 160mm front/rear Center Lock |
| ↗ Manettes - Shiftlevers | Shimano Altus STEF505 7s |
| ⌚ Jeu de direction - Headset | FSA NO.10 semi-integrated |
| ↖ Cintre - Handlebar | XLC alloy 6061, Width: 700mm, Rise: 15mm, Ø: 31.8mm |
| ⌚ Poignées - Grips | Velo Double Density 130mm |
| ➡ Potence - Stem | XLC alloy, 6°, Ø: 31.8mm, L: 60mm |
| ↖ Tige de selle - Seatpost | XLC alloy, Ø: 30.9mm, L: 400mm |
| ↔ Selle - Saddle | XLC Women by DDK |
| ● Moyeu avant - Front hub | Shimano HBTX505, 32H Center Lock QR |
| ● Moyeu arrière - Rear hub | Shimano HBTX505, 32H Center Lock QR |
| □ Jantes - Rims | Lapiierre Disc, 32H, 27.5", 21-584 |
| ○ Pneus - Tires | Mitas Ocelot 27.5x2.1 54-584 |
| ↘ Pédales - Pedals | Xerama SP-400 |



Alloy Suprême 5



3x7 Speed



27.5"

